
## **Arcus Mono Installation**





## Terminal Labelling:

L1 E ( Switched Live Earth Neutral


Emergency L2 DA/AT3 DA/AT3 Dimming -/D1/DA +/D2/DA L3


Unswitched Live DALI Autotest DALI Autotest


Analogue/DSI/DALI Analogue/DSI/DALI Switch Dim / Corridor Function




WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598; specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. LUMINAIRES WITH EMERGENCY PACK: When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.



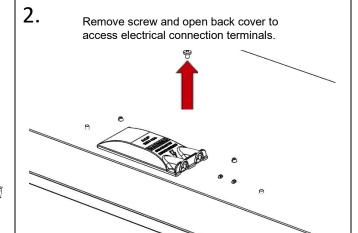





Once electrical connection is made, offer luminaire into ceiling aperture diagonally and rest on rear face of ceiling T grids – be sure to check it sits

correctly on all 4


sides.

way as a tile!)



NOTE – THE DIFFUSERS ARE NOT DESIGNED TO BE REMOVED.....DO NOT ATTEMPT AS IT MAY RESULT IN ELECTRIC SHOCK!!!

Once installed, test for operation.



6.

## **Arcus Mono Installation**



