

220-240V / 50-60Hz

IP20



Terminal Labelling:

Power	
L1	Switched Live
E	Earth
N	Neutral
Emergency	
L2	Unswitched Live
DA/AT3	DALI Autotest
DA/AT3	DALI Autotest
Dimming	
-/D1/DA	Analogue/DSI/DALI
+/D2/DA	Analogue/DSI/DALI
L3	Switch Dim / Corridor Function

WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source is non replaceable. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

1. Install two suspension drops for the first luminaire at 1144mm centres.

Subsequent fitting only require a single suspension drop. Suspend another suspension wire in line with the previous fitting. This should be approximately 1200mm from the previous suspension drop.

2.

Carefully suspend the second luminaire on the wire from the last set of holes in the rail. Adjust luminaire to the correct height. Be sure that the ends of the two luminaires meet naturally.

3. Check that the luminaires line up with each other so that there is no gap between them and position joining bracket on rear.

4.

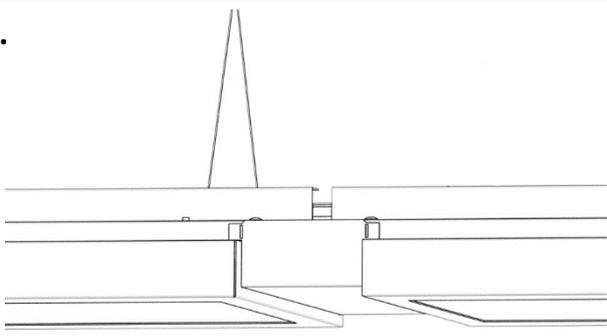
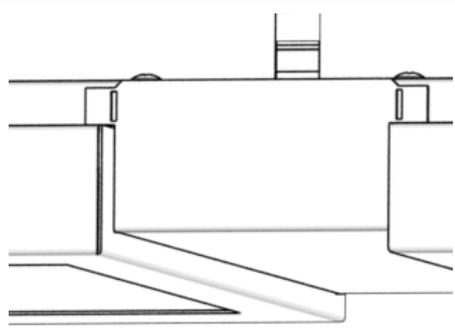
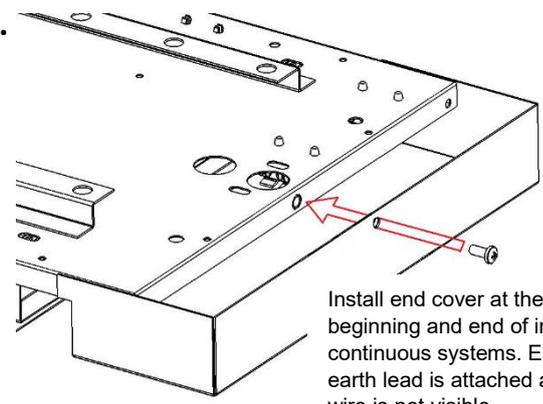
Secure the joining plate in place on the back using 4no. M4x5 screws from the front of the luminaires.

5.

6.

Connect the looms from each luminaire and ensure all excess can be safely stored in the space between them. If there is too greater amount of loom to store safely, gently pull the loom back through the luminaire from the nearest corner or until an equal amount protrudes from either end.

MOD Suspended Installation

<p>7.</p>  <p>Bend both tabs on the joining cover out, connect earth lead to tab and fit the cover in place between the two luminaires ensuring the loom is completely concealed.</p>	<p>8.</p>  <p>Make sure the tabs are then bent back over the luminaire frames and holding securely. Ensure the earth wire is not visible after install.</p>
<p>9.</p>  <p>Install end cover at the beginning and end of inline continuous systems. Ensure earth lead is attached and wire is not visible.</p>	<p>10.</p> <p>Repeat steps 1 through 5 for any additional inline luminaires.</p>
<p>11.</p>	<p>12.</p>
<p>13.</p>	<p>14.</p>