

INTERCONNECTING LEAD (DIMMABLE LUMINAIRE)

|C= |C=





-1


=

-

27

INTERCONNECTING LEAD (DIMMABLE LUMINAIRE)

PRODUCT SPECIFICATION

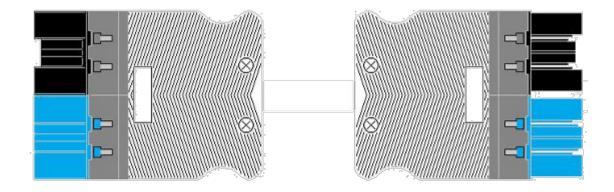

INTRODUCTION

Lead to connect Dimmable luminaire to dimmable luminaire – Blue/black 6 pole male non-locking luminaire connector to 6 pole female blue-black non-locking luminaire connector, 6 x 1.5mm2 conductor cores.

INTERCONNECTING LEAD (DIMMABLE LUMINAIRE)


PRODUCT SPECIFICATION

FEATURES & BENEFITS

Compatible with:

Luminaires fitted with 6 pole panel mount (6PM). Note: C3470 – 6 Pole "T" piece may be required when interconnecting luminaires.

IMAGES



ORDER CODES

LEAD

Code	Description
FF 6PM 6P3M 6PF	Lead - Luminaire interconnecting, 3 metres long with 6 pole male blue/black non-locking connector to 6 pole female blue/black non-locking connector
FF 6PM 6P4M 6PF	Lead - Luminaire interconnecting, 4 metres long with 6 pole male blue/black non-locking connector to 6 pole female blue/black non-locking connector
FF 6PM 6P5M 6PF	Lead - Luminaire interconnecting, 5 metres long with 6 pole male blue/black non-locking connector to 6 pole female blue/black non-locking connector
FF 6PM 6P6M 6PF	Lead - Luminaire interconnecting, 6 metres long with 6 pole male blue/black non-locking connector to 6 pole female blue/black non-locking connector
FF 6PM 6P7M 6PF	Lead - Luminaire interconnecting, 7 metres long with 6 pole male blue/black non-locking connector to 6 pole female blue/black non-locking connector
FF 6P TPIECE	6 pole blue/black T piece - one T piece required to be plugged into each luminaire with a 6 pole panel mount (6PM) that has an interconnect lead fed out to the next luminaire.