

230-240V / 50-60Hz

IP20

IK00



WARNING - THIS LUMINAIRE MUST BE EARTHED

This luminaire has been tested and is manufactured to comply with BS EN 60598 : specification for general requirements and tests. It should be installed by a suitably qualified person in accordance with IEE.

CAUTION: there is a potential risk of electric shock from the LED boards when the product is operational with the cover removed.

NOTE: INSTALLATION AND OPERATION OF THE LUMINAIRE BEYOND ITS SCOPE OF SUPPLY WILL INVALIDATE THE WARRANTY.

DIL-0295-0001

1.


The fitting will come complete and ready to be installed.

Non-emergency fittings are circuit selectable.



E3 ONLY – Track must be wired :


- L1 = Switched Live
- L2 = Unswitched Live
- L3 = Not required



2.


Standard - Lock bracket is optional (skip to step 4 if not required)
Emergency – Lock bracket **must** be used.

Secure bracket to rear of housing using 2 M4x5 screws supplied. Choose fixing position dependant on fittings orientation to track.

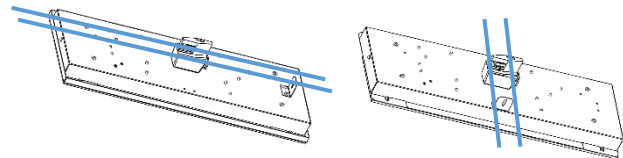


3.

Insert the Lock bracket assembly up into the track, tighten the screw and the bracket will twist and lock into the track.

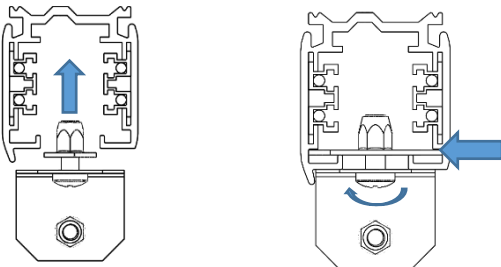


4.

Standard - Insert the track adapter into the global track. Push the lock on to secure the fitting to the track. Then twist the Dial to 1 in order to connect the live feed.

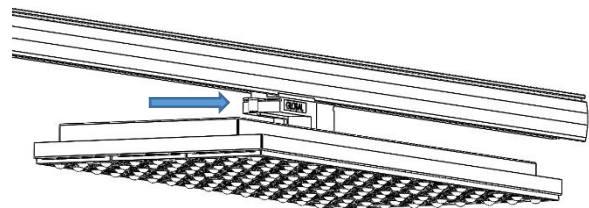

5.

Emergency - Insert the track adapter into the global track. Then rotate the adapter until it locks into place.

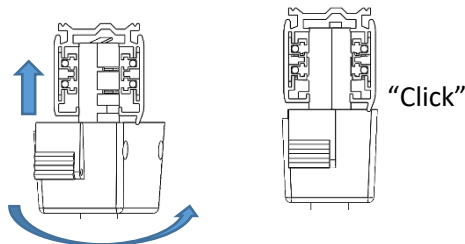

6.

Slide the fitting up the track until you meet the lock bracket. Secure in place using the M4 x 10 screw provided.

