


Interconnecting Lead (non-dimmable luminaire)

Product Specification

+44 (0)1747 858100
dextragroup.co.uk/dexsor

Dexsor
DETECTION

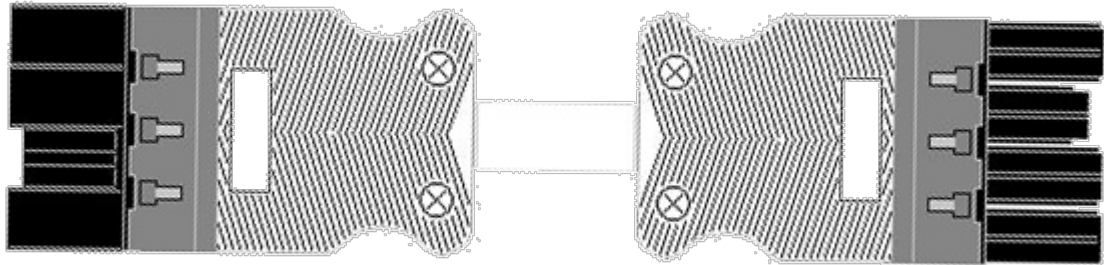

INTRODUCTION

Interconnecting lead - Fixed output (non-dimmable luminaire) to fixed output (non-dimmable luminaire) - 4 pole male black non-locking luminaire connector to 4 pole female black non-locking luminaire connector, 4 x 1.5mm² conductor cores.

FEATURES & BENEFITS

COMPATIBLE WITH:

Luminaires fitted with 4 pole panel mount (4PM).

Note: C3801 - 4 Pole "T" piece may be required when interconnecting luminaires.

IMAGES



ORDER CODES

LEAD

Code	Description
C3803	Lead - Luminaire interconnecting, 3 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
C3802	Lead - Luminaire interconnecting, 4 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
C3806	Lead - Luminaire interconnecting, 5 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
C3808	Lead - Luminaire interconnecting, 6 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
C38080	Lead - Luminaire interconnecting, 7 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector

Note: When interconnecting luminaires with 4 pole panel mounts (4PM), you will need to order for each luminaire a C3801 - 4 Pole black "T" piece. The last interconnected luminaire will not require a "T" piece. This "T" piece is plugged into the luminaires 4 pole panel mount and enables the interconnecting leads to be connected.