

# EXI Track Installation


220-240V / 50-60Hz  
IP20



Terminal Labelling:	
<b>Power</b>	
L1	Switched Live
E	Earth
N	Neutral
<b>Emergency</b>	
L2	Unswitched Live
DA/AT3	DALI Autotest
Dimming	DALI Autotest
-/D1/DA	Analogue/DSI/DALI
+/D2/DA	Analogue/DSI/DALI
L3	Switch Dim / Corridor Function


**WARNING:** Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source is non replaceable. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

1.

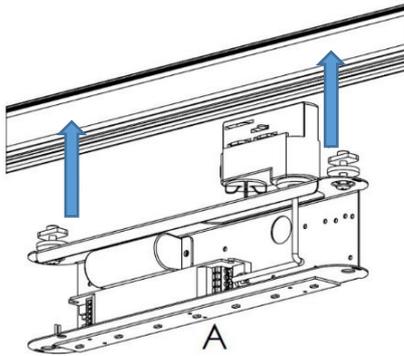


Fit the track adaptor in place, set the required circuit and offer the body up to the track.

2.

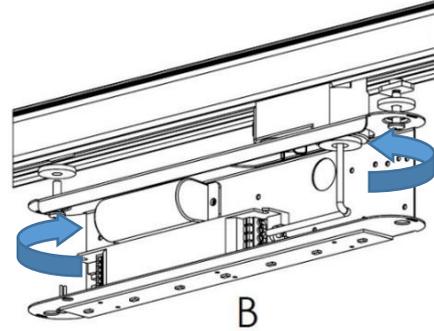


Tighten the twist brackets in place. Enter the commissioning date on the label of the battery and connect the 2-way battery connector.

3. If using flush fixings:

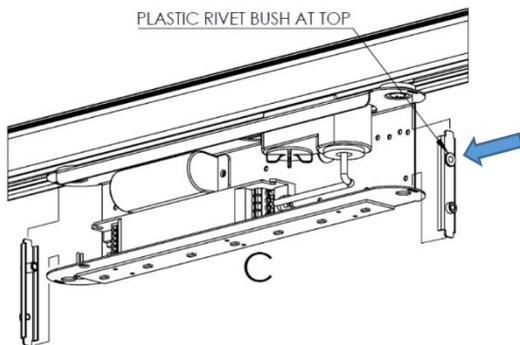


The side brackets should be fitted with the plastic bush at the top.

4.

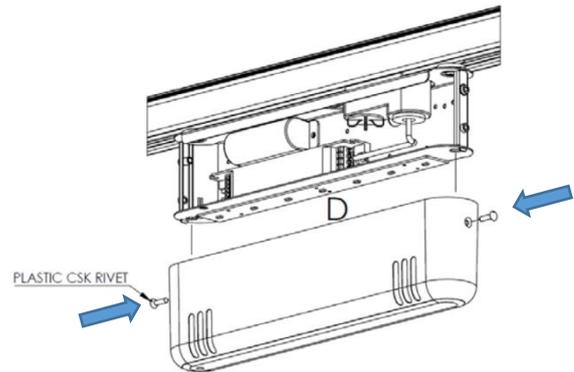


Fit the cover, ensuring that the charge indicator is visible through its locating hole and push the plastic counter sunk rivets into place to hold the cover.

5. If using counter sunk screws:

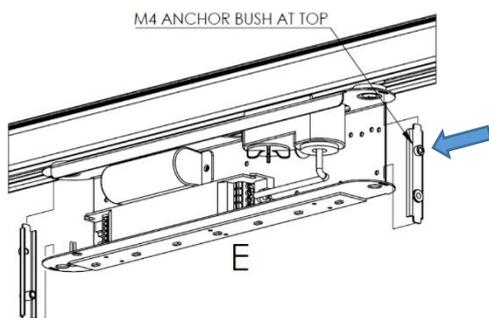

The side brackets should be fitted with the M4 anchor bush at the top.

6.

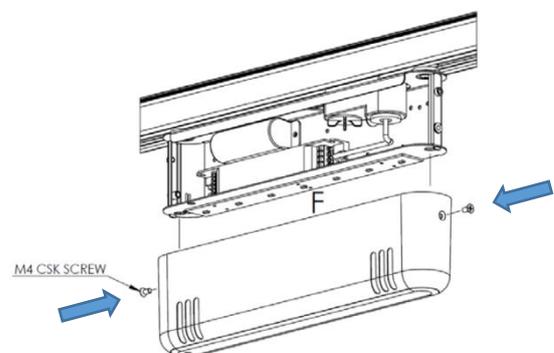

Fit the cover, ensuring that the charge indicator is visible through its locating hole and fit the M4 counter sunk screws to hold the cover in place.