

220-240V / 50-60Hz  
IP20




Terminal Labelling:	
<b>Power</b>	
L1	Switched Live
E	Earth
N	Neutral
<b>Emergency</b>	
L2	Unswitched Live
DA/AT3	DALI Autotest
DA/AT3	DALI Autotest
<b>Dimming</b>	
-/D1/DA	Analogue/DSI/DALI
+/D2/DA	Analogue/DSI/DALI
L3	Switch Dim / Corridor Function


**WARNING:** Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source is non replaceable. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

## 1. Trunking Mounted


Partly loosen 4x screws on each bracket.

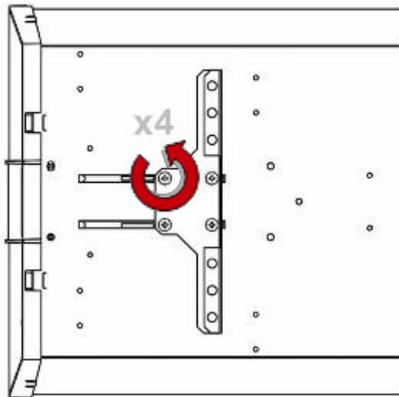


## 2. Slide mount bracket out, and re-tighten 4x screws on each bracket.

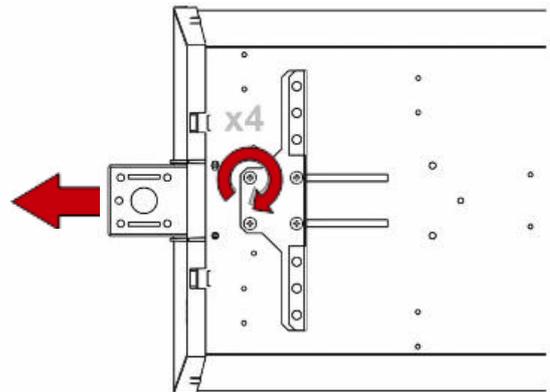

## 3. Offer fitting up to trunking and fix into position using 20mm brass bush and black plastic packer provided.

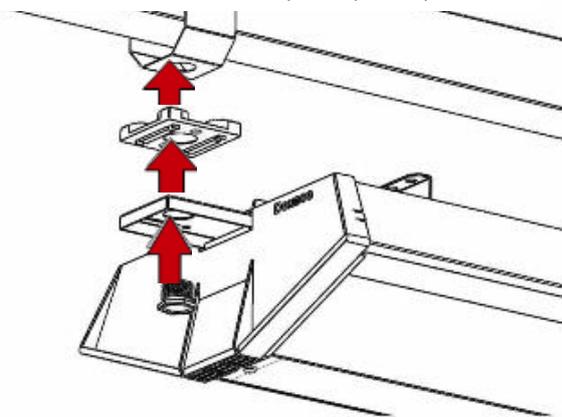


## 4. Thread safety tethers over trunking and through both brackets on the rear of the fitting.

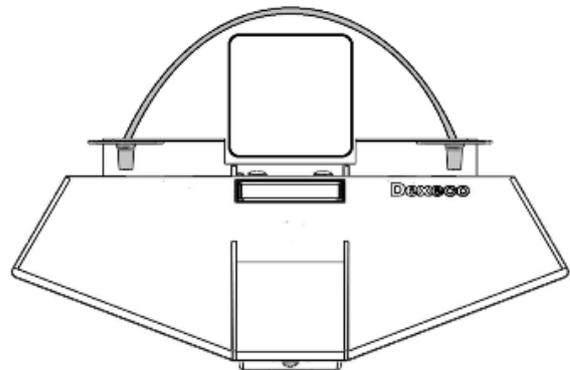





## 5. Suspended

**NOTE: NOT RECOMMENDED FOR CHAIN OR NON-RIGID FIXING WHEN USED WITH SENSOR**  
(Suspension kit supplied separately)

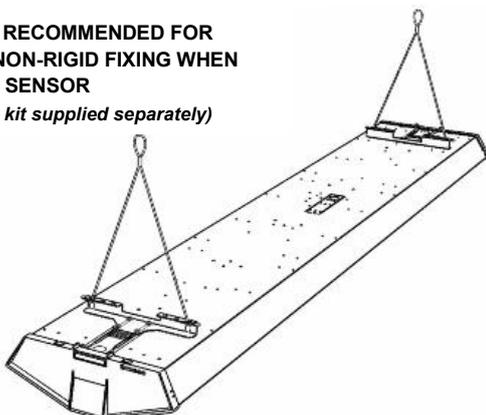

## 6. Suspend fitting by 2x suspension brackets on rear of fitting. Ensure 4x screws on each bracket are fully tightened.

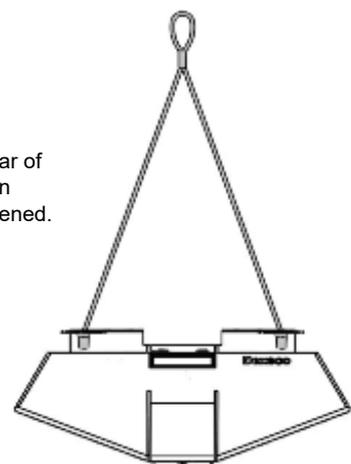
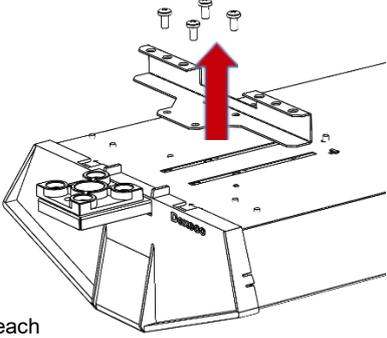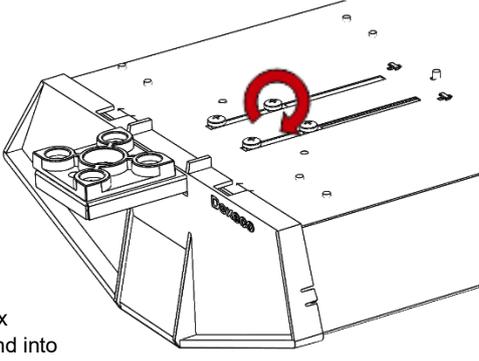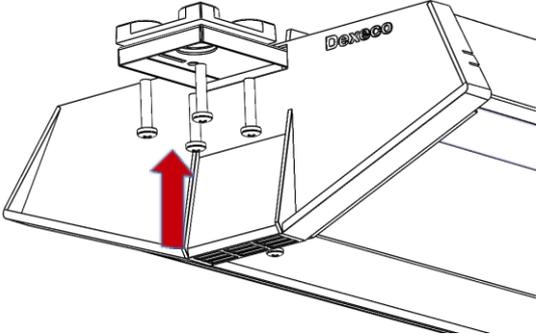
<p><b>7.</b> <b>Surface Mounted</b></p>  <p>Remove 4x screws from each end and remove the suspension bracket. Take care as the slide out bracket will now be loose.</p>	<p><b>8.</b></p>  <p>Re-insert the 4x screws each end into the sliding bracket and secure in place.</p>
<p><b>9.</b> Ensure the black plastic packer is used when surface mounting– this will stand the fitting off the ceiling.</p> 	<p><b>10.</b></p> <p>Wire into fitting as through metal back flap as normal.</p>
<p><b>11.</b></p>	<p><b>12.</b></p>
<p><b>13.</b></p>	<p><b>14.</b></p>