

# Opus Column Installation

230-240V / 50-60Hz

IP65

IK09



## WARNING - THIS LUMINAIRE MUST BE EARTHED

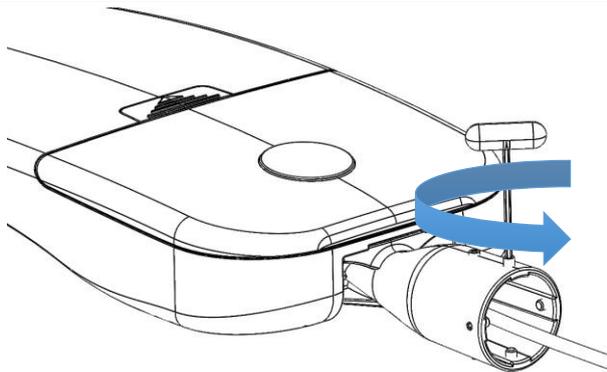
This luminaire has been tested and is manufactured to comply with BS EN 60598 : specification for general requirements and tests. It should be installed by a suitably qualified person in accordance with IEE.

**CAUTION:** there is a potential risk of electric shock from the LED boards when the product is operational with the cover removed.

**NOTE:** INSTALLATION AND OPERATION OF THE LUMINAIRE BEYOND ITS SCOPE OF SUPPLY WILL INVALIDATE THE WARRANTY.


DIL-0186-0001

1.




Using a 4mm Allen Key, loosen all the grub screws sufficiently to allow for the column diameter.

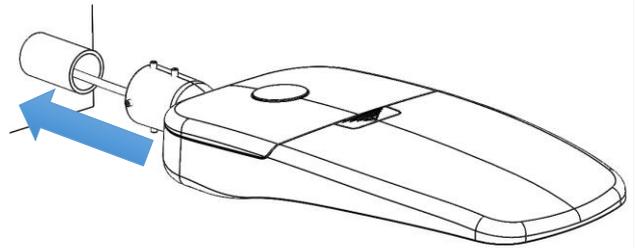2.




Feed the mains cable into the column and offer the spigot up to the column.

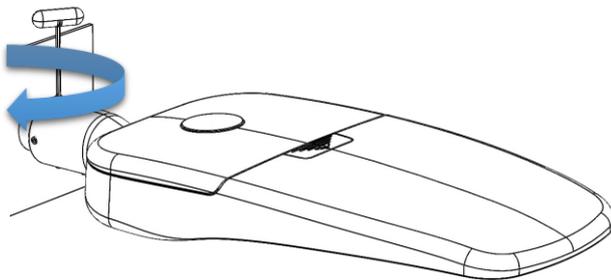3.



Using the 4mm Allen Key, tighten all the grub screws slightly so the fitting can still rotate.

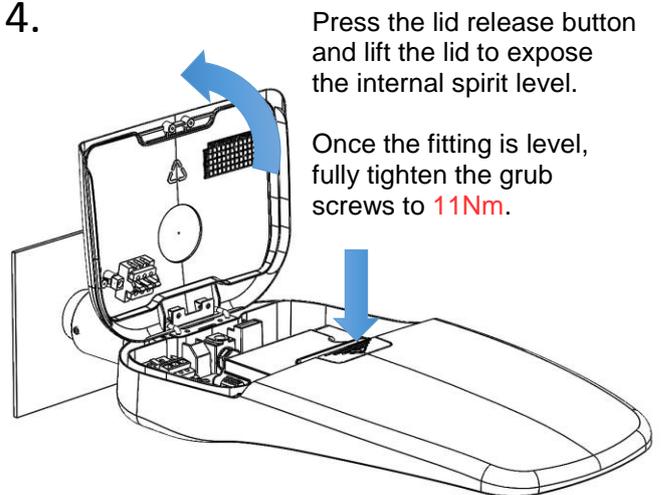
4.



Press the lid release button and lift the lid to expose the internal spirit level.

Once the fitting is level, fully tighten the grub screws to **11Nm**.

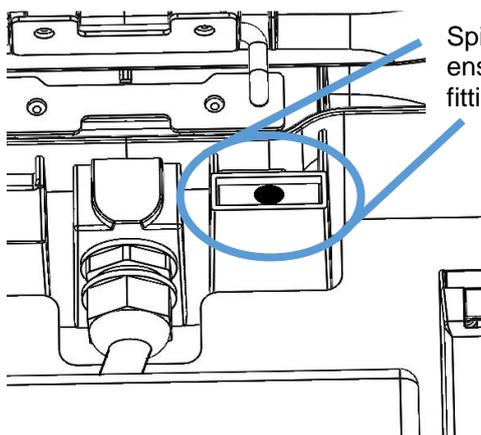5.




Spirit level to ensure the fitting is level









6.

To close the lid, apply force to the centre and always check that the lid has been closed properly.

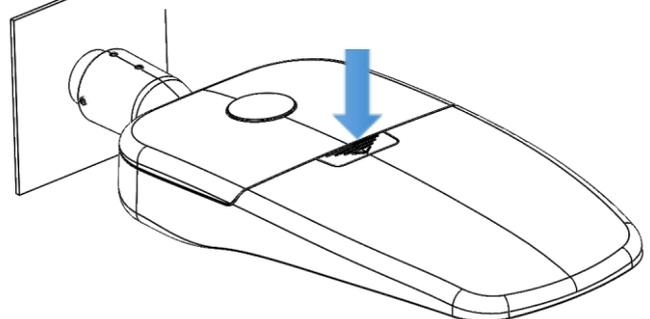The release button should sit flush with the housing when closed.



## Opus Column Installation
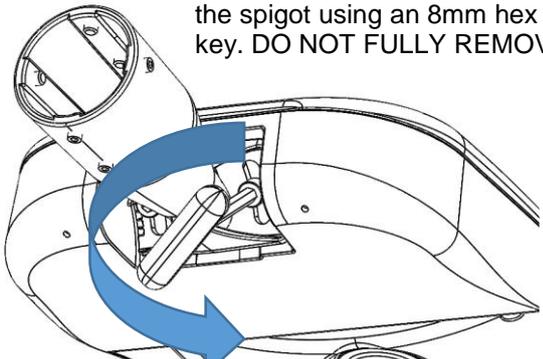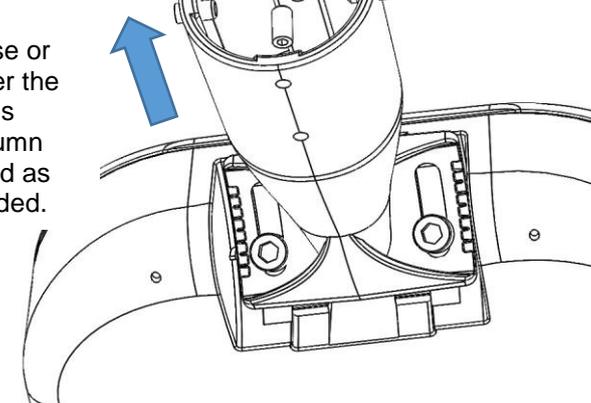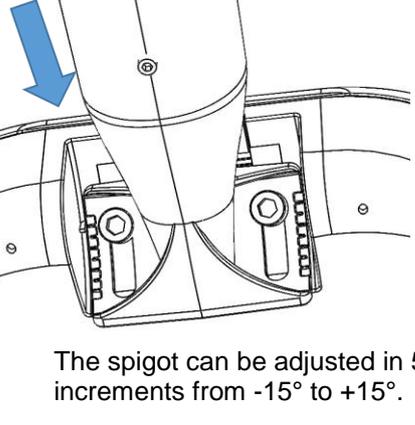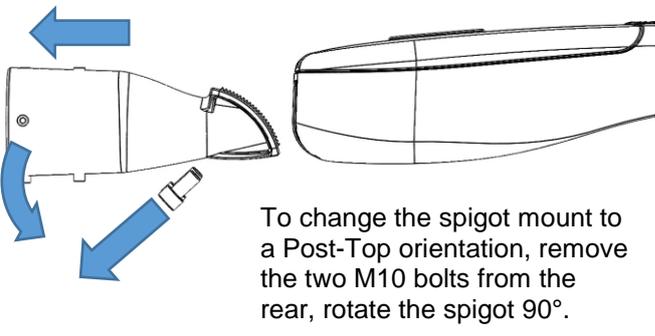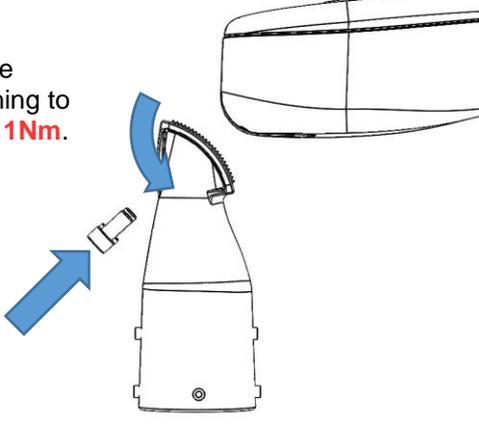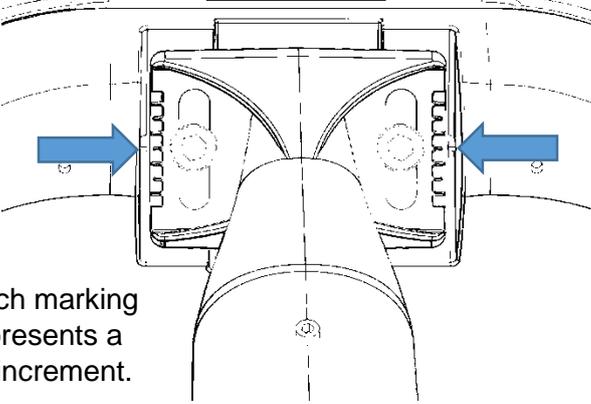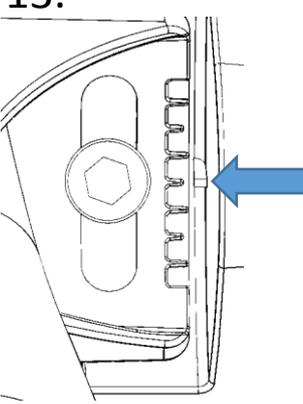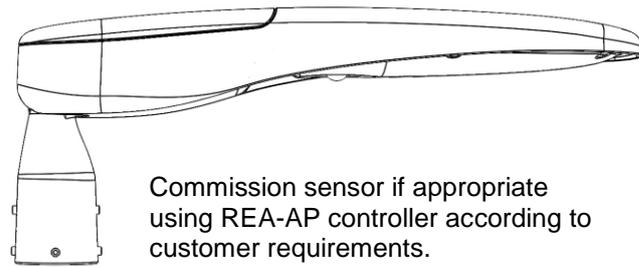
|  |   |
|--|---|
| <p>7.</p> <p>To adjust the vertical mounting angle, loosen the M10 bolts on the spigot using an 8mm hex key. <b>DO NOT FULLY REMOVE.</b></p>    | <p>8.</p> <p>Raise or lower the Opus Column Head as needed.</p>   |
| <p>9.</p>  <p>The spigot can be adjusted in 5° increments from -15° to +15°.</p>   | <p>10.</p>  <p>To change the spigot mount to a Post-Top orientation, remove the two M10 bolts from the rear, rotate the spigot 90°.</p>                          |
| <p>11.</p> <p>Re-attach the bolts, tightening to a torque of <b>11Nm</b>.</p>   | <p>12.</p>  <p>Each marking represents a 5° increment.</p>  |
| <p>13.</p>  <p>When 0° or neutral orientation of the luminaire (with both vertical and horizontal spigot positioning) is required, the central mark on the spigot must align with the mark on the body. <b>DO NOT</b> use any part of the body to reference from.</p> | <p>14.</p> <p>Follow steps 1-8 to install on a Column.</p>  <p>Commission sensor if appropriate using REA-AP controller according to customer requirements.</p> |