


REA 7 DSL Lead

Product Specification

+44 (0)1747 858100
dextragroup.co.uk/dexsor

Dexsor
DETECTION

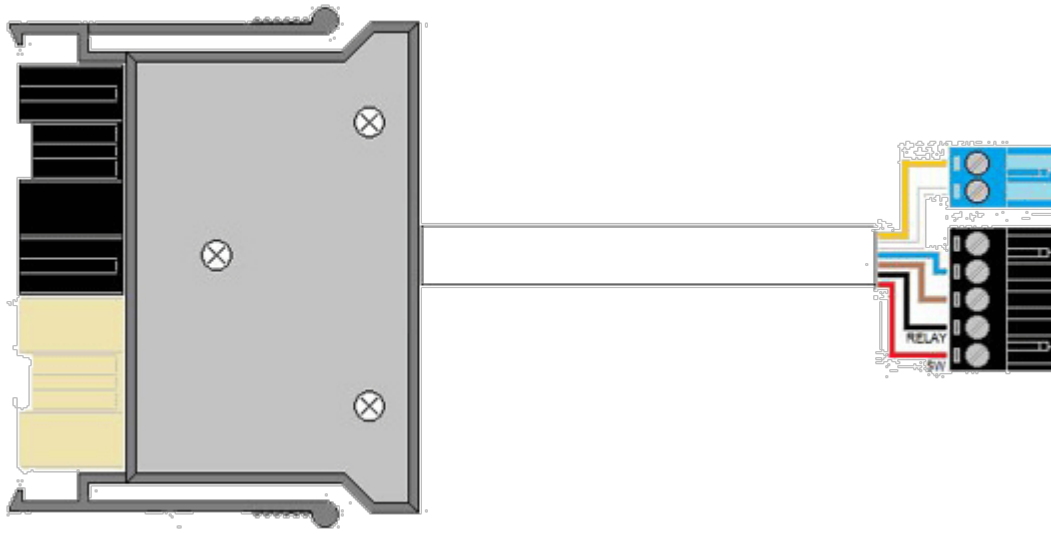

INTRODUCTION

Interconnecting lead - REA 7 BLBK 6/7P MB Lighting Control Module (LCM) to Reacta 7 occupancy dimming/switching sensor and Reacta 8 daylight dimming/switching sensor - Black/Grey 7 pole male locking LCM connector to 5+2 pole female black+blue sensor connectors, 6 x 1mm² conductor cores.

FEATURES & BENEFITS

COMPATIBLE WITH:

- REA 7 BLBK 6/7P MB - Lighting Control Module (LCM)
- REAF 7 AR15 LL - Sensor (not listed on website)
- REAF 7 DR15 LL - Sensor
- REAF 7 AR15 LL ML T - Sensor (not listed on website)
- REAF 7 DR15 LL ML T - Sensor
- REAF 8 DR15 LL ML - Sensor

IMAGES



ORDER CODES

LEAD

Code	Description
REA 7 DSLW753	Lead - LCM to dimming/switching sensor, 3 metres long with 7 pole male black/grey locking connector to 5+2 pole female black+blue connector
REA 7 DSLW755	Lead - LCM to dimming/switching sensor, 5 metres long with 7 pole male black/grey locking connector to 5+2 pole female black+blue connector