



PRODUCT SPECIFICATION

BISQUE



INTRODUCTION

The Bisque incorporates a unique quatrefoil shaped head manufactured with high quality die cast aluminium and incorporates the latest state of the art lens optics. The mounting arm comes with an annotated dial allowing you to rotate the fitting head to the exact angle required ensuring that they can be positioned precisely and consistently with minimal effort along the length of the track. In addition the slim line flush mounted gear can come with a clear plastic cover on the rear enabling quick identification of the driver for ease of future maintenance. Available in two colours, three beam angles and multiple lumen outputs this eye catching new range of track spots has been developed for clients requiring their lighting installation to create impact and effect.

- CE
- IP20

APPLICATION

- Accent Lighting
- Display Lighting
- Retail

SPECIFICATION

CONSTRUCTION

- Robust die cast aluminium housing
- High performance custom lens optic
- All luminaires supplied with three circuit track adaptor

PERFORMANCE

- Available in 1400lm, 2000lm and 3000lm LED variants
- CRI 80+
- All sources available in either 3000K or 4000K colour temperatures

INSTALLATION

- All luminaires supplied with three circuit track adaptor for simple installation and location changes
- All track adaptors come with a rotary dial for individual control and circuit selection
- Unique dials allow the fitting head to be both rotated and pivoted to the exact angle required
- 16 amp three circuit track system available with 90° corner joints, tee pieces, straight couplers and cross couplers allowing track to be designed to suit a wide range of layouts

VARIATIONS

- White or black bodies and accessories
- 3000K and 4000K colour temperatures
- CRI 90+ available upon request
- Philips Premium White, Premium Colour and Crisp White available upon request
- Philips Food Premium Red and Food Warm White available upon request

IMAGES

PRODUCT IMAGES



Bisque - White - Honeycomb



Bisque - White - Opaque




Bisque - White - side




Bisque - White - behind

TECHNICAL

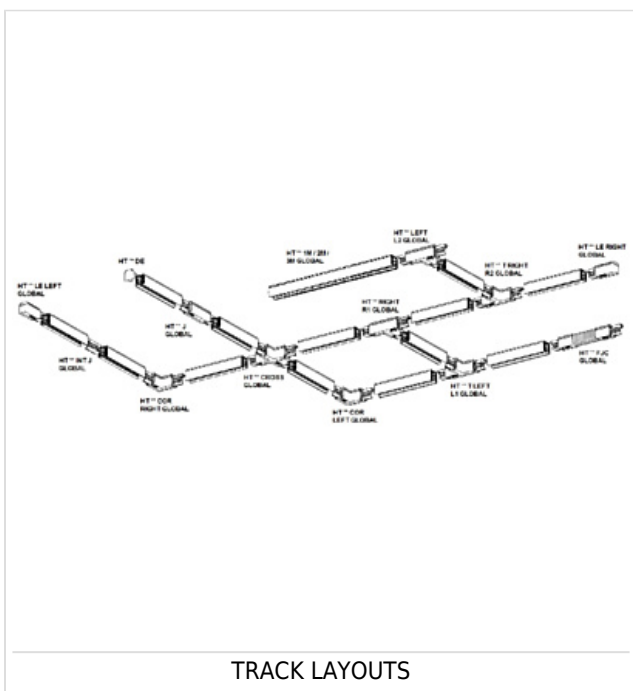

TRACK LAYOUTS

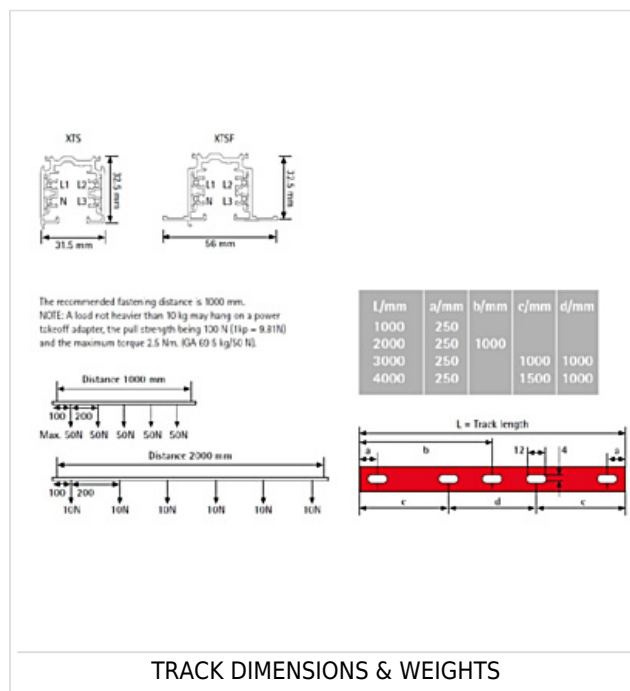

TRACK DIMENSIONS & WEIGHTS

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years

defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a three year warranty for parts and labour. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty.
- Protec Micro, 7W Fire Rated Downlights and Serenus are provided with a five year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges including Glide Power, Glide Mini, Glide RGBW, Colour Glide, Glide In Ground, Glide Pixel and AluLED ranges are supplied with a three year parts or replacement luminaire only warranty.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

[DOWNLOAD WARRANTY PDF](#)

ORDER CODES

LUMINAIRE CODES

Code	Description	Circuit Wattage	Llm/W
BSQ ** L14 25	Bisque LED, 1400 Lumen, 25 Degree Lens Optic, Colour 84	10.4W	82
BSQ ** L20 25	Bisque LED, 2000 Lumen, 25 Degree Lens Optic, Colour 84	14.1W	86

BSQ ** L30 25	Bisque LED, 3000 Lumen, 25 Degree Lens Optic, Colour 84	22.4W	81
BSQ ** L14 25 C83	Bisque LED, 1400 Lumen, 25 Degree Lens Optic, Colour C83	10.4W	82
BSQ ** L20 25 C83	Bisque LED, 2000 Lumen, 25 Degree Lens Optic, Colour C83	14.1W	86
BSQ ** L30 25 C83	Bisque LED, 3000 Lumen, 25 Degree Lens Optic, Colour C83	22.4W	81
BSQ ** L14 40	Bisque LED, 1116lm, 40 Degree Lens Optic, Colour 84	9.6W	116
BSQ ** L20 40	Bisque LED, 1573lm, 40 Degree Lens Optic, Colour 84	13.9W	113
BSQ ** L30 40	Bisque LED, 2307lm, 40 Degree Lens Optic, Colour 84	22.2W	104
BSQ ** L14 40 C83	Bisque LED, 1116lm, 40 Degree Lens Optic, Colour C83	9.6w	116
BSQ ** L20 40 C83	Bisque LED, 1573lm, 40 Degree Lens Optic, Colour C83	13.9w	113
BSQ ** L30 40 C83	Bisque LED, 2307lm, 40 Degree Lens Optic, Colour C83	22.2w	104

** Insert BL for Black or leave blank for White.