




PRODUCT SPECIFICATION

OPUS COLUMN SMALL

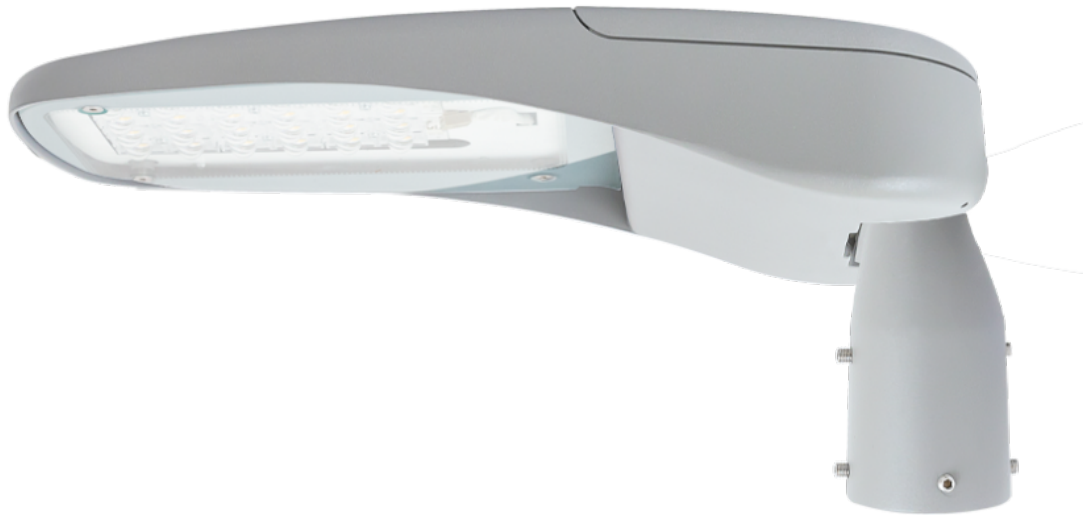

INTRODUCTION

The Opus Column Small compliments our Opus Column range with an unobtrusive housing offering up to 7,000lm output ideal for lower column heights and smaller external areas. An IP65 rated die cast aluminium housing, weather resistant matt grey paint finish and toughened glass cover ensure that this range is suitable for use in a wide range of applications, whilst optical control is achieved through high efficiency lenses which give a range of distributions allowing the luminaire to be tailored to your application and maximise spacings between columns.

Quick and simple installation is central to the design ethos of the Opus Column to ensure minimum installation costs and to maximise return on investment. The spigot is adjustable for both horizontal and vertical mounting and can be easily adjusted in 5 degree increments to achieve the required angle. All luminaires are supplied prewired with a 10M cable to allow for electrical connection at the base of the column and the control gear access hatch has an automatic disconnect feature allowing individual luminaires to be maintained without the need to isolate entire circuits. An optional NEMA socket is available with this range allowing for the addition of photocells or wireless control systems. The Opus Column is also supplied complete with a prewired 10M lead for quick and simple installation.

- CE
- IP65
- L90 / 60K OPERATING HOURS
- 3 STEP MACADAM ELLIPSE

APPLICATION

- Commercial/Offices
- Education
- Exterior
- Healthcare/Social Housing
- Hotel/Leisure
- Industrial/Manufacturing
- Parking/Exterior
- Retail
- Transport

SPECIFICATION

CONSTRUCTION

- Die cast aluminium IP65 contoured housing
- Toughened glass cover

PERFORMANCE

- Up to 7000lm output.
- Available in wide and open area lens variants to suit differing applications and column spaces.

INSTALLATION

- Adjustable spigot for both horizontal and vertical mounting
- Available in three spigot sizes.
- Supplied complete with 10M prewired cable for ease of installation

VARIATIONS


- Available in 3000 kelvin

IMAGES

PRODUCT IMAGES




Opus Column Small with spigot in the vertical position

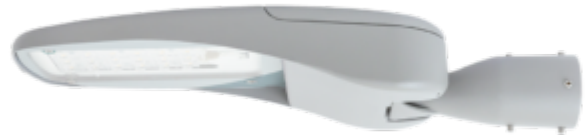

Opus Column Small with spigot in the horizontal position

TECHNICAL

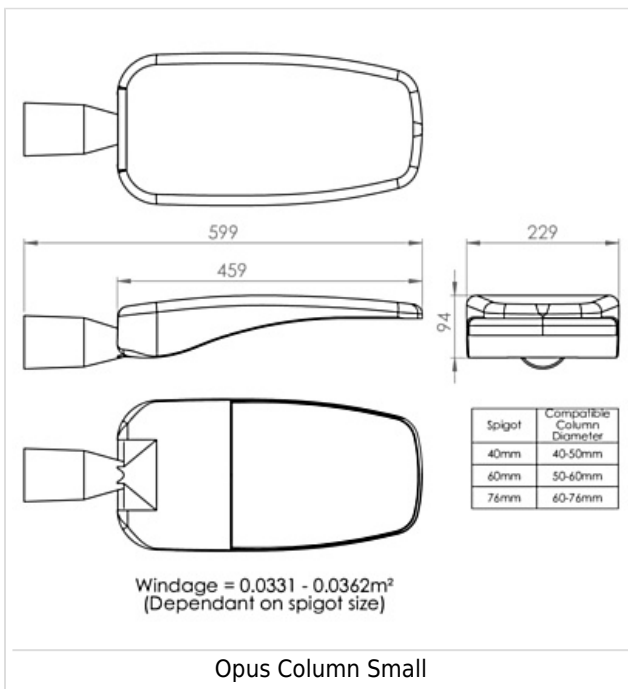

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years

defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a three year warranty for parts and labour. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty.
- Protec Micro, 7W Fire Rated Downlights and Serenus are provided with a five year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges including Glide Power, Glide Mini, Glide RGBW, Colour Glide, Glide In Ground, Glide Pixel and AluLED ranges are supplied with a three year parts or replacement luminaire only warranty.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

[DOWNLOAD WARRANTY PDF](#)

ORDER CODES

LUMINAIRE CODES

Code	Description	Circuit Wattage	Llm/W
Wide			
OPUCSL L44 W	Opus Column Small, 3819lm, Wide, Colour 74	25.6W	149

OPUCSL L60 W	Opus Column Small, 52081lm, Wide, Colour 74	34.4W	151
OPUCSL L70 W	Opus Column Small, 60771lm, Wide, Colour 74	42W	144
Open Area			
OPUCSL L44 OA	Opus Column Small, 36611lm, Open Area, Colour 74	25.6W	143
OPUCSL L60 OA	Opus Column Small, 49921lm, Open Area, Colour 74	34.4W	145
OPUCSL L70 OA	Opus Column Small, 58211lm, Open Area, Colour 74	42W	138

LIGHTING CONTROL

Code	Description
NEM	NEMA Socket
PH	Photocell

INSTALLATION

Code	Description
S40	40-50mm Spigot
S50	50-60mm Spigot
S60	60-76mm Spigot

Please specify spigot size when ordering

OPUCWB

Please order luminaire less spigot when purchasing the wall mount bracket option

MISC

Code	Description
C73	Colour 73