



PRODUCT SPECIFICATION

MOD CAELUS



INTRODUCTION

In health care and educational establishments decorative lighting effects can have a significant impact on the well being of patients and pupils. The Mod Caelus range is available with a range of graphic designs including clouds, blossom and trees allowing the simulation of skylights and other decorative features that can be especially effective in large buildings where it may not be possible to incorporate windows in internal rooms. Images can be divided over multiple luminaires to create larger panoramic images with greater visual impact.

The MOD Caelus is available in 600×600 and 1200×600 sizes, a wide range of lumen outputs, dimming options including white tunable and is also compatible with a range of wireless control systems. These provide localised grouping and control as well as comprehensive wireless solutions allowing both standard and emergency luminaires to be centrally monitored with centralised reporting of energy consumption and failures. IP44 options are also available where a greater level of protection is required.

UK CA	CE	IP40	IP44	TM21: L90>60K Hours / L80>90K Hours	3 STEP MACADAM ELLIPSE	TP(a)
----------	----	------	------	--	---------------------------	-------

APPLICATION

- Education
- Healthcare / Social Housing

SPECIFICATION

CONSTRUCTION

- Housing: 0.7mm CR4 steel
- Finish: Polyester powder painted BS 00E55 matt white 60% gloss
- Diffuser: 2mm high transmission opal polycarbonate TP(a) rated
- IK08
- IP40

PERFORMANCE

- 3SCDM Three step Macadams ellipse
- TM21: L90>60K Hours / L80>90K Hours

ENVIRONMENTAL

- Designed to allow simple replacement of components with commonly available tools in compliance with the Eco Design Directive, please see the installation leaflet for maintenance instructions.
- Powered by European branded drivers and emergency modules ensuring replacement parts are easily sourced.
- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- Contains no single use plastics or polystyrene packaging.
- Supplied in plain card boxes with paper tape ensuring packaging is easily recycled.
- Designed to allow simple disassembly for end of life recycling.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

EMERGENCY

- Not available with emergency

CONTROL

- Optional compatibility with a range of dimming systems including DALI, DSI and Switch Dimming
- Optional White tunable
- Optional integral Reacta-Link for integration with Reacta-Link wireless installations
- Optional integral Reacta-Control for integration with Reacta-Control wireless installations

INSTALLATION

- Suitable for plasterboard installation when purchased with the appropriate plasterboard kit
- Suitable for lay in installation in exposed T ceiling grids and pull up installation in SAS120, Armstrong Orcal 1800 and Burgess Clip-in ceiling, please specify lay in or pull up accordingly. Alugrid compatible variants available.

VARIATIONS

- Available with a wide range of colour temperatures and renderings
- Available in a range of housing sizes and lumen outputs
- Available with a range of images including clouds, trees and blossom, custom images are available on request.

IMAGES

PRODUCT IMAGES



MOD Caelus Cloud



IMPR Caelus



MOD Secure Caelus



MOD Caelus Array



MOD Caelus Cloud




MOD Caelus Blossom







MOD Caelus Trees

PROJECT IMAGES

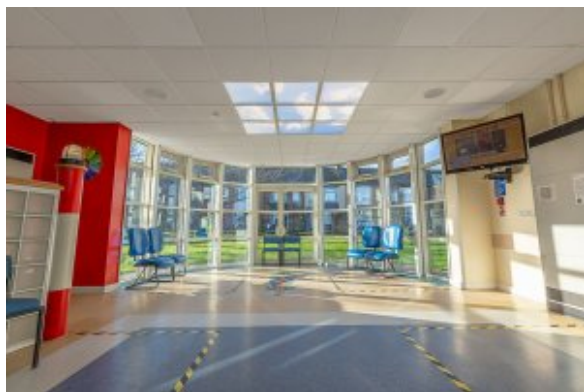

TECHNICAL

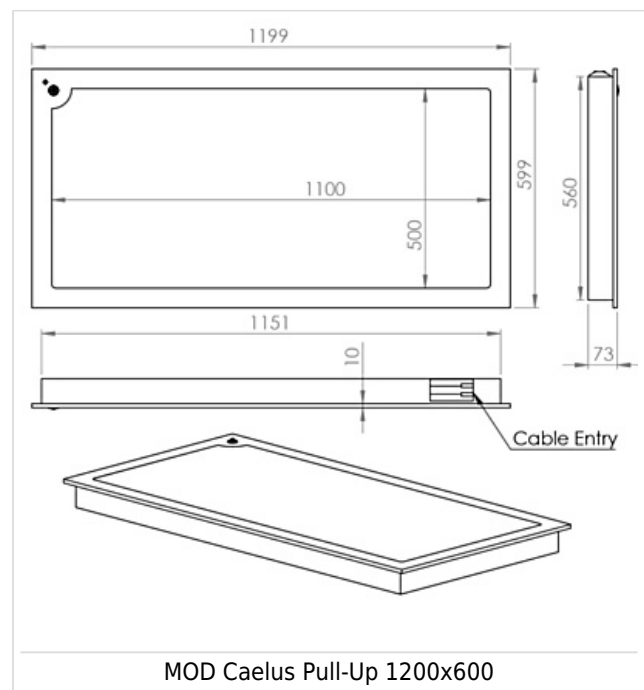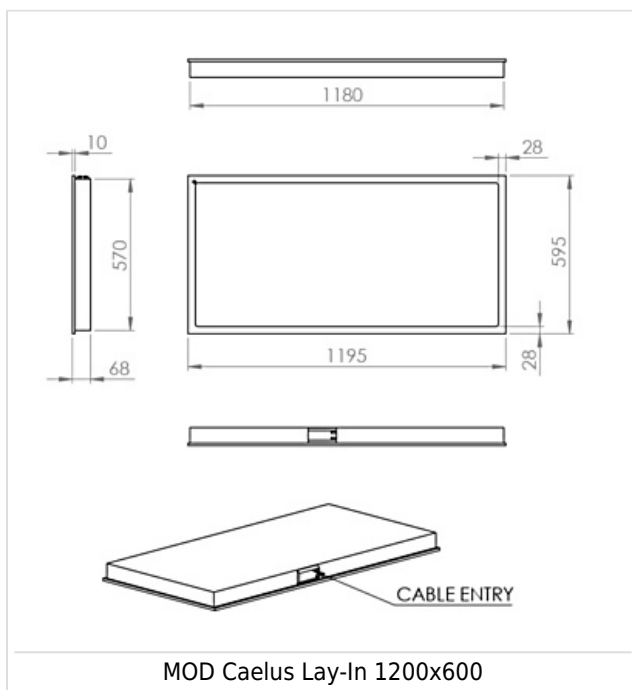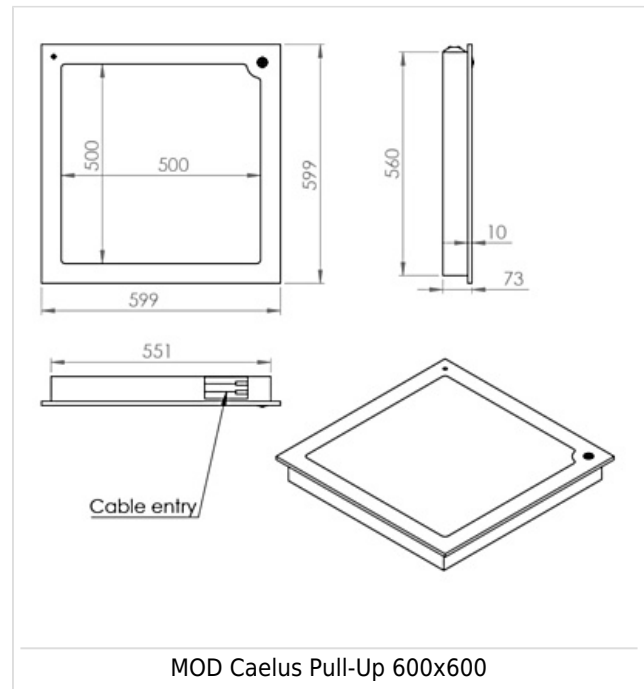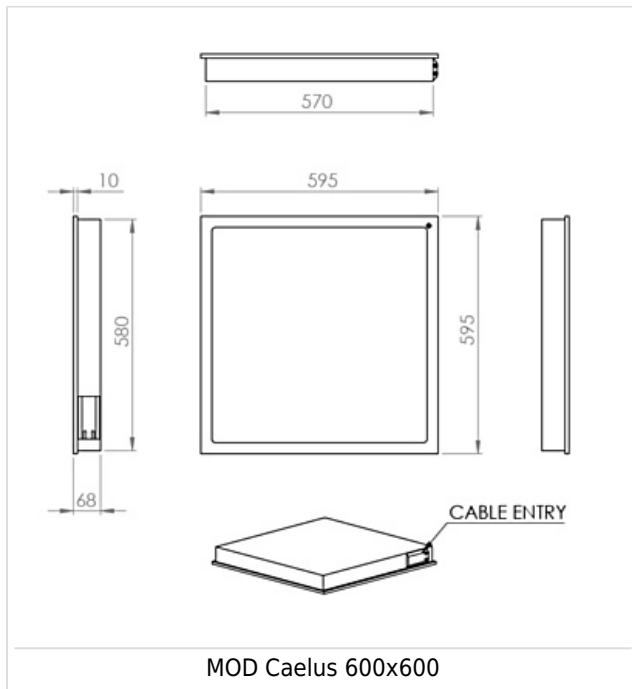

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years

defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a three year warranty for parts and labour. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty. TWS IP65 L7 in autotest and wireless variants are supplied with the standard three year lithium battery warranty.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW and the MOD RGBW. These three ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

[DOWNLOAD WARRANTY PDF](#)

ORDER CODES

LUMINAIRE

Code	Description	Power	Llm/W
MCAR L35 CL1205	Mod Caelus, 600x600, Lay-In, 1,060lm, Cloud Image, Colour 84	21.6W	49
MCAR L45 CL1205	Mod Caelus, 600x600, Lay-In, 1,354lm, Cloud Image, Colour 84	26.5W	51
MCAR 126 L70 CL1208	Mod Caelus, 1200x600, Lay-In, 2,107lm, Cloud Image, Colour 84	38.6W	54
MCAR 126 L90 CL1208	Mod Caelus, 1200x600, Lay-In, 2,709lm, Cloud Image, Colour 84	50.2W	53
MCAR L35 2X2 CL12072	Mod Caelus, 600x600, Lay-In, 1,060lm, 4X 600x600 luminaires Cloud, Colour 84	21.6W	49
MCAP L35 CL1205	Mod Caelus, 600x600, Pull-Up, 1,060lm, Cloud Image, Colour 84	21.6W	49
MCAP L45 CL1205	Mod Caelus, 600x600, Pull-Up, 1,354lm, Cloud Image, Colour 84	26.5W	51
MCAP 126 L70 CL1208	Mod Caelus, 1200x600, Pull-Up, 2,107lm, Cloud Image, Colour 84	38.6W	54
MCAP 126 L90 CL1208	Mod Caelus, 1200x600, Pull-Up, 2,709lm, Cloud Image, Colour 84	50.2W	53
MCAR L35 TR12051	Mod Caelus, 600x600, Lay-In, 1,060lm, Tree Image, Colour 84	21.6W	49
MCAR L45 TR12051	Mod Caelus, 600x600, Lay-In, 1,354lm, Tree Image, Colour 84	26.5W	51
MCAR 126 L70 TR12081	Mod Caelus, 1200x600, Lay-In, 2,107lm, Tree Image, Colour 84	38.6W	54
MCAR 126 L90 TR12081	Mod Caelus, 1200x600, Lay-In, 2,709lm, Tree Image, Colour 84	50.2W	53
MCAR L35 2X2 TR12074	Mod Caelus, 600x600, Lay-In, 1,060lm, 4X 600x600 luminaires Tree, Colour 84	21.6W	49
MCAP L35 TR12051	Mod Caelus, 600x600, Pull-Up, 1,060lm, Tree Image, Colour 84	21.6W	49
MCAP L45 TR12051	Mod Caelus, 600x600, Pull-Up, 1,354lm, Tree Image, Colour 84	26.5W	51
MCAP 126 L70 TR12081	Mod Caelus, 1200x600, Pull-Up, 2,107lm, Tree Image, Colour 84	38.6W	54
MCAP 126 L90 TR12081	Mod Caelus, 1200x600, Pull-Up, 2,709lm, Tree Image, Colour 84	50.2W	53
MCAR L35 BM12071	Mod Caelus, 600x600, Lay-In, 1,060lm, Blossom Image, Colour 84	21.6W	49
MCAR L45 BM12071	Mod Caelus, 600x600, Lay-In, 1,354lm, Blossom Image, Colour 84	26.5W	51
MCAR 126 L70 BM12079	Mod Caelus, 1200x600, Lay-In, 2,107lm, Blossom Image, Colour 84	38.6W	54
MCAR 126 L90 BM12079	Mod Caelus, 1200x600, Lay-In, 2,709lm, Blossom Image, Colour 84	50.2W	53
MCAR L35 2X2 BM12041	Mod Caelus, 600x600, Lay-In, 1,060lm, 4X 600x600 luminaires Blossom, Colour 84	21.6W	49
MCAP L35 BM12071	Mod Caelus, 600x600, Pull-Up, 1,060lm, Blossom Image, Colour 84	21.6W	49
MCAP L45 BM12071	Mod Caelus, 600x600, Pull-Up, 1,354lm, Blossom Image, Colour 84	26.5W	51
MCAP 126 L70 BM12079	Mod Caelus, 1200x600, Pull-Up, 2,107lm, Blossom Image, Colour 84	38.6W	54
MCAP 126 L90 BM12079	Mod Caelus, 1200x600, Pull-Up, 2,709lm, Blossom Image, Colour 84	50.2W	53

Pull-Up variants of the MOD Caelus are not suitable for array installations

Custom images and other panorama sizes are available on request.

For plasterboard ceilings please specify lay-in luminaire and appropriate plasterboard kit.

DIMMING

Code	Description
A	DALI Digital Addressable Lighting Interface
S	Switch Dimming
D	DSI Digital Dimming
H	HFR Analogue 1-10v
C	Bi-Level Dimming For Standalone Switched Sensor
WT	White Tunable (Lumen Outputs Vary from Standard)

Please click [here](#) for full details on our white tunable offer.

CONTROL

Code	Description
RLI	Reacta-Link, Wireless Enabled Luminaire
RC	Reacta-Control, Wireless Enabled Luminaire

MISCELLANEOUS

Code	Description
C**	Select Colour Temperature and Rendering; C83, C84, C85, C865, C93, C94
4PM	4 Pole Panel Mount
6PM	6 Pole Panel Mount
IP44	IP44 Below the Ceiling Only
PBK 123	1200x300 Plasterboard Kit
PBK 126	1200x600 Plasterboard Kit
PBK 66	600x600 Plasterboard Kit
RECESSED TETHER KIT TWIN	Secondary fix twin drop.
LSF	Low Smoke Zero Halogen