


PRODUCT SPECIFICATION

MOD SLIM

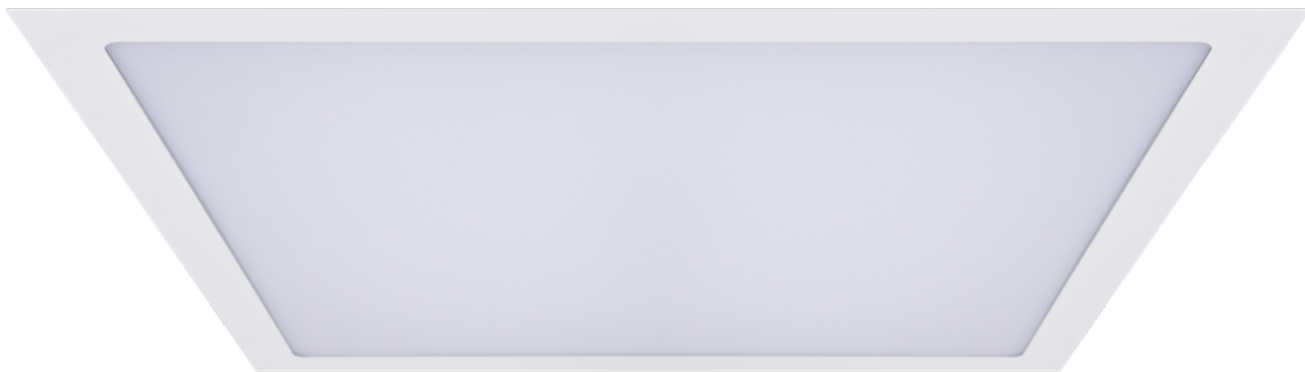

INTRODUCTION

The Mod Slim is a traditional flat panel luminaire with a uniformly lit diffuser, using backlit technology ensuring superb efficiency as well as benefitting LED lifetime by using a high chip count run at low output to minimise operating temperature.

The Mod Slim is available in a wide range of sizes and lumen outputs, as well as lay in and pull up variants to suit all common ceiling types. Surface versions are available for solid ceilings in the surface section of our website. This versatility is further complimented with optional dimming control gear, integral lithium emergency and integral sensors providing presence detection, daylight regulation and wireless linking. We offer a range of wireless control systems providing localised grouping and control as well as comprehensive wireless solutions allowing both standard and emergency luminaires to be centrally monitored.

With multiple variants compatible with the glare requirements of BSEN 12464 the Mod Slim can be used in applications such as offices and schools, but is also suitable for a wide range of installations from ancillary and circulation areas through to retail applications.

UK CA	CE	IP40	IP44	IK08	TM21: L90>60K Hours / L80>90K Hours	3 STEP MACADAM ELLIPSE	TP(a)
----------	----	------	------	------	--	---------------------------	-------

APPLICATION

- Canteen
- Commercial / Offices

- Corridor
- Education
- Healthcare / Social Housing
- Hotel / Leisure
- Industrial / Manufacturing
- Office
- Retail
- Transport
- Warehouse / Storage

SPECIFICATION

CONSTRUCTION

- Housing: 0.7mm CR4 steel
- Finish: Polyester powder painted BS 00E55 matt white 60% gloss
- Diffuser: 2mm high transmission opal polycarbonate TP(a) rated
- IK08
- IP40
- IP44

PERFORMANCE

- Part L2 compliant
- BSEN 12464-1:2011 3000 Candela 65° and UGR 19 compliance
- 3SCDM Three step Macadams ellipse
- TM21: L90>60K Hours / L80>90K Hours
- Up to 145 luminaire lumens per circuit Watt.
- Multiple lumen outputs are compliant with BSEN 12464 3000 candela glare requirements and therefore suitable for applications with monitors in use. A range of higher lumen output glare compliant products are offered under our MOD LED Office range where required.

ENVIRONMENTAL

- Designed to allow simple replacement of components with commonly available tools in compliance with the Eco Design Directive, please see the installation leaflet for maintenance instructions.
- Powered by European branded drivers and emergency modules ensuring replacement parts are easily sourced.
- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- Contains no single use plastics or polystyrene packaging.
- Supplied in plain card boxes with paper tape ensuring packaging is easily recycled.
- Designed to allow simple disassembly for end of life recycling.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

EMERGENCY

- Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.
- Optional Reacta-Link wireless emergency for automated centralised reporting.
- Optional Reacta-Control wireless emergency for automated centralised reporting.
- Optional central battery changeover relay

CONTROL

- Optional compatibility with a range of dimming systems including DALI, DSI and Switch Dimming
- Optional White tunable
- Optional Integral R44 presence and daylight sensor
- Optional Integral Reacta-Air wireless presence and daylight regulations sensor
- Optional integral Reacta-Link for integration with Reacta-Link wireless installations
- Optional integral Reacta-Control for integration with Reacta-Control wireless installations

INSTALLATION

- Suitable for plasterboard installation when purchased with the appropriate plasterboard kit
- Alugrid 08 and 16 compatible options available. Please see miscellaneous ordering codes.
- Suitable for lay in installation in exposed T ceiling grids and pull up installation in SAS120, Armstrong Orcal 1800 and Burgess Clip-in ceiling, please specify lay in or pull up accordingly.

VARIATIONS

- Available with a wide range of colour temperatures and renderings
- Available in a range of lumen outputs
- Available with optional night light

IMAGES

PRODUCT IMAGES



MOD Slim 600x600



MOD Slim 1200x300



MOD Slim 1200x600



MOD Terminal Cover



MOD Slim 600x600 with RAS










Tether Kit

PROJECT IMAGES



TECHNICAL

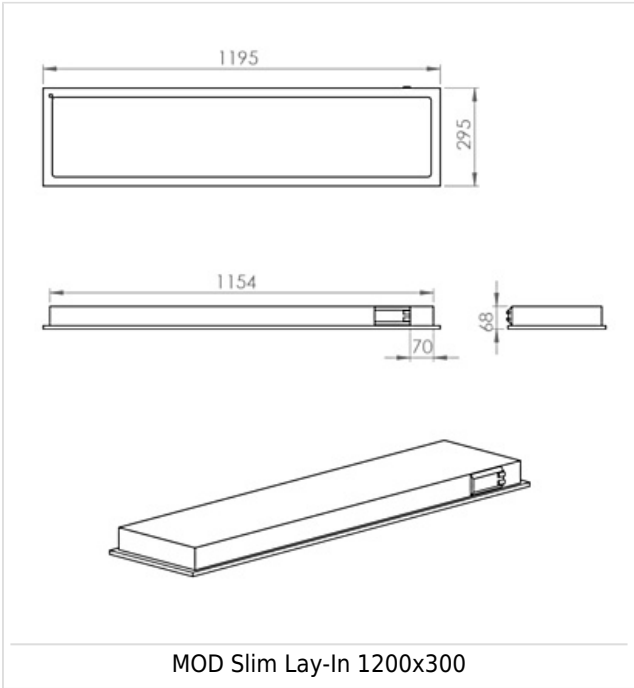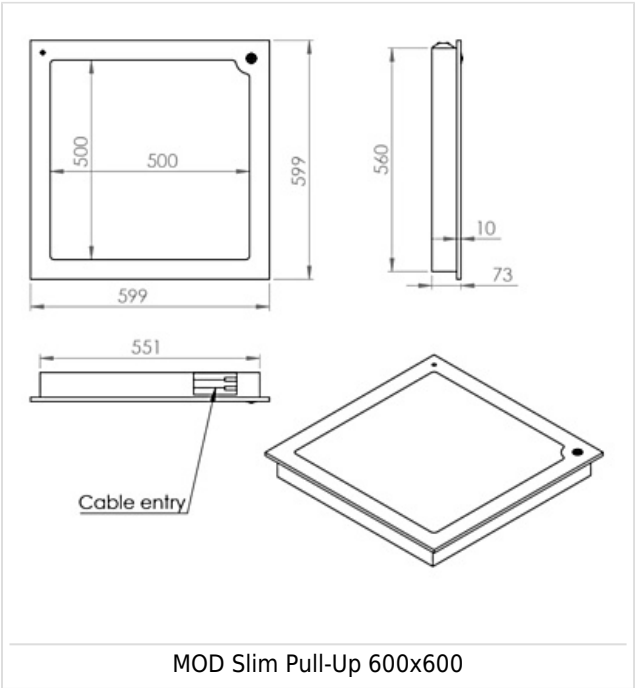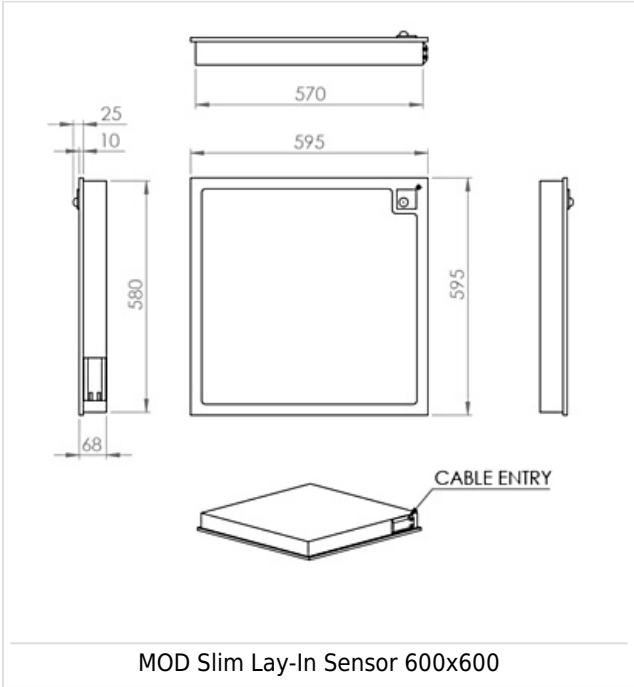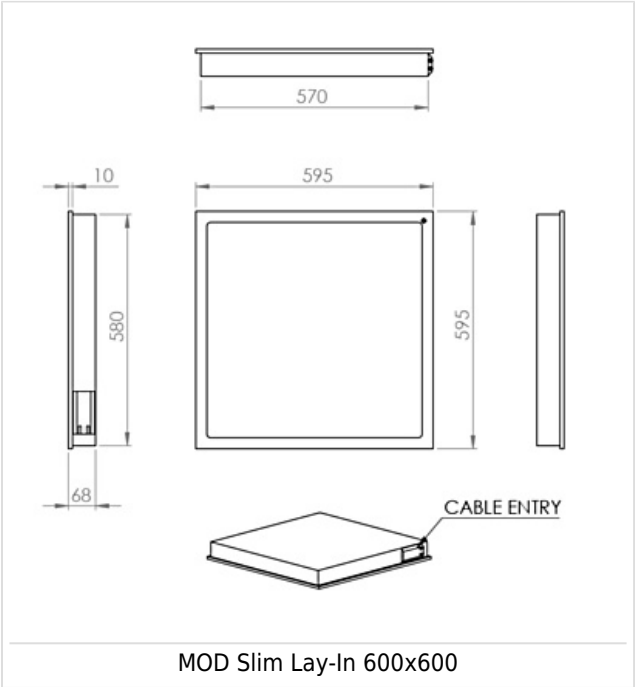

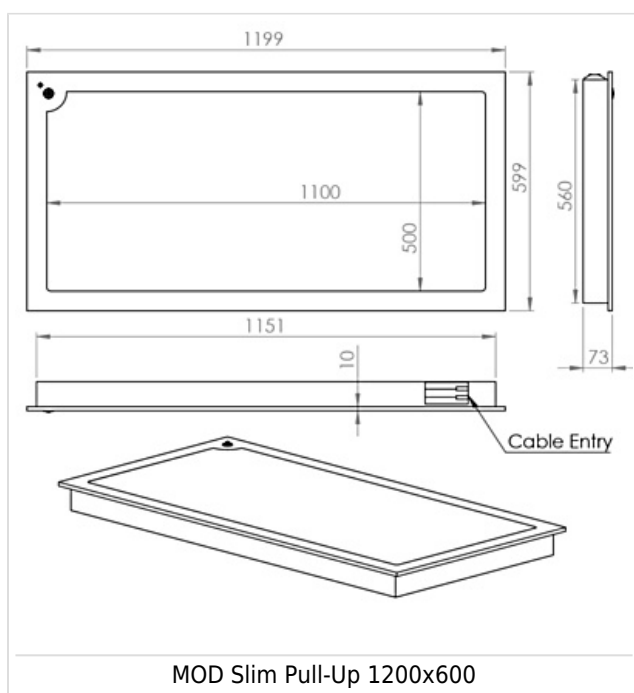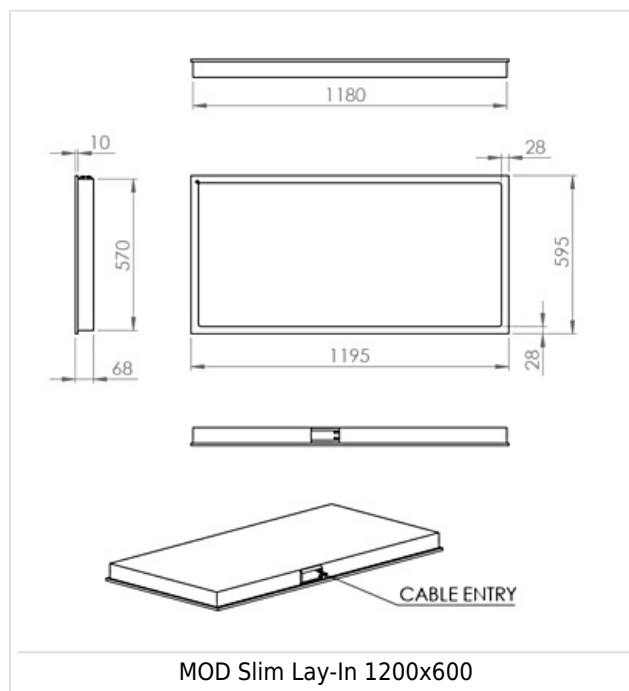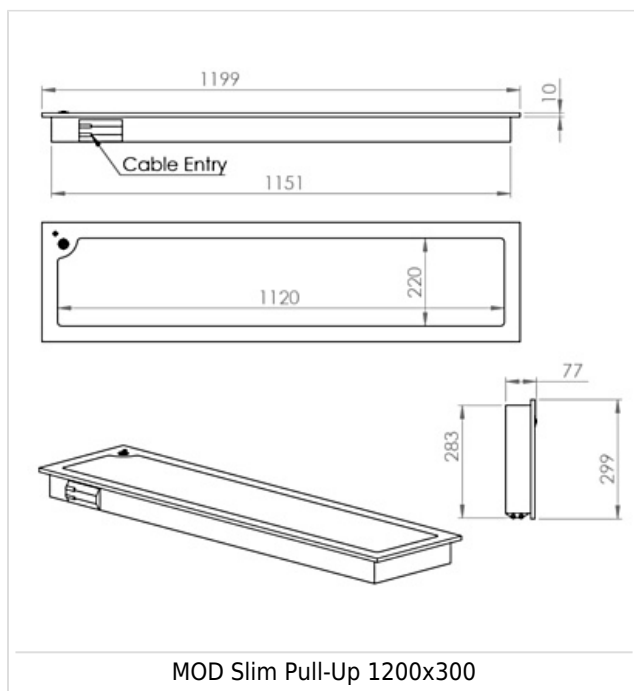

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years

defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a three year warranty for parts and labour. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty. TWS IP65 L7 in autotest and wireless variants are supplied with the standard three year lithium battery warranty.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW and the MOD RGBW. These three ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

[DOWNLOAD WARRANTY PDF](#)

ORDER CODES

LUMINAIRE

Lay In

Code	Description	Power	Llm/W
MODRS L17	MOD Slim, Lay-In, 600x600, 1,317llm, Colour 84*	10.6W	124
MODRS L22	MOD Slim, Lay-In, 600x600, 1,705llm, Colour 84*	13.3W	128
MODRS L29	MOD Slim, Lay-In, 600x600, 2,248llm, Colour 84*	17.1W	131
MODRS L35	MOD Slim, Lay-In, 600x600, 2,718llm, Colour 84*	21.6W	125
MODRS L45	MOD Slim, Lay-In, 600x600, 3,484llm, Colour 84	26.5W	131
MODRS L55	MOD Slim, Lay-In, 600x600, 4,257llm, Colour 84	33.1W	129
MODRS L68	MOD Slim, Lay-In, 600x600, 5,252llm, Colour 84	39.9W	132
MODRS L76	MOD Slim, Lay-In, 600x600, 5,890llm, Colour 84	42.1W	140
MODRS 123 L17	MOD Slim, Lay-In, 1200x300, 1,173llm , Colour 84*	10.6W	111
MODRS 123 L22	MOD Slim, Lay-In, 1200x300, 1,531llm, Colour 84	13.3W	115
MODRS 123 L29	MOD Slim, Lay-In, 1200x300, 2,018llm, Colour 84*	17.1W	118
MODRS 123 L35	MOD Slim, Lay-In, 1200x300, 2,436llm, Colour 84*	21.6W	113
MODRS 123 L45	MOD Slim, Lay-In, 1200x300, 3,134llm, Colour 84	26.5W	118
MODRS 123 L55	MOD Slim, Lay-In, 1200x300, 3,828llm, Colour 84	33.1W	116
MODRS 123 L68	MOD Slim, Lay-In, 1200x300, 4,739llm, Colour 84*	39.9W	119
MODRS 123 L76	MOD Slim, Lay-In, 1200x300, 5,290llm, Colour 84	42.1W	126
MODRS 126 L58	MOD Slim, Lay-In, 1200x600, 4,648llm, Colour 84*	31.9W	146
MODRS 126 L70	MOD Slim, Lay-In, 1200x600, 5,532llm, Colour 84*	38.6W	143
MODRS 126 L90	MOD Slim, Lay-In, 1200x600, 7,268llm, Colour 84	50.2W	145
MODRS 126 L136	MOD Slim, Lay-In, 1200x600, 10,904llm, Colour 84	80.4W	136
MODRS 126 L152	MOD Slim, Lay-In, 1200x600, 12,160llm, Colour 84	87.1W	140

For Alugrid compatible versions please specify lay-in luminaire with correct ALU suffix shown in miscellaneous ordering codes

For plasterboard ceilings please specify lay-in luminaire and appropriate plasterboard kit.

Pull Up

Code	Description	Power	Llm/W
MODPS L17	MOD Slim, Pull-Up, 600x600, 1,317llm, Colour 84*	10.6W	124
MODPS L22	MOD Slim, Pull-Up, 600x600, 1,705llm, Colour 84*	13.3W	128
MODPS L29	MOD Slim, Pull-Up, 600x600, 2,248llm, Colour 84*	17.1W	131
MODPS L35	MOD Slim, Pull-Up, 600x600, 2,718llm, Colour 84*	21.6W	125
MODPS L45	MOD Slim, Pull-Up, 600x600, 3,484llm, Colour 84	26.5W	131
MODPS L55	MOD Slim, Pull-Up, 600x600, 4,257llm, Colour 84	33.1W	129
MODPS L68	MOD Slim, Pull-Up, 600x600, 5,252llm, Colour 84	39.9W	132
MODPS L76	MOD Slim, Pull-Up, 600x600, 5,890llm, Colour 84	42.1W	140
MODPS 123 L17	MOD Slim, Pull-Up, 1200x300, 1,173llm , Colour 84*	10.6W	111
MODPS 123 L22	MOD Slim, Pull-Up, 1200x300, 1,531llm, Colour 84	13.3W	115
MODPS 123 L29	MOD Slim, Pull-Up, 1200x300, 2,018llm, Colour 84*	17.1W	118
MODPS 123 L35	MOD Slim, Pull-Up, 1200x300, 2,436llm, Colour 84*	21.6W	113
MODPS 123 L45	MOD Slim, Pull-Up, 1200x300, 3,134llm, Colour 84	26.5W	118
MODPS 123 L55	MOD Slim, Pull-Up, 1200x300, 3,828llm, Colour 84	33.1W	116
MODPS 123 L68	MOD Slim, Pull-Up, 1200x300, 4,739llm, Colour 84*	39.9W	119
MODPS 123 L76	MOD Slim, Pull-Up, 1200x300, 5,290llm, Colour 84	42.1W	126
MODPS 126 L58	MOD Slim, Pull-Up, 1200x600, 4,648llm, Colour 84*	31.9W	146
MODPS 126 L70	MOD Slim, Pull-Up, 1200x600, 5,532llm, Colour 84*	38.6W	143
MODPS 126 L90	MOD Slim, Pull-Up, 1200x600, 7,268llm, Colour 84	50.2W	145
MODPS 126 L136	MOD Slim, Pull-Up, 1200x600, 10,904llm, Colour 84	80.4W	136
MODPS 126 L152	MOD Slim, Pull-Up, 1200x600, 12,160llm, Colour 84	87.1W	140

*BSEN 12464 compliant options. Please see the MOD Office and MOD UGR for a wider range of glare compliant luminaires.

DIMMING

Code	Description
A	DALI Digital Addressable Lighting Interface
S	Switch Dimming
D	DSI Digital Dimming
H	HFR Analogue 1-10v
C	Bi-Level Dimming For Standalone Switched Sensor
WT	White Tunable (Lumen Outputs Vary from Standard)

Please click [here](#) for full details on our white tunable offer.

HFR not available in L17 or L22 versions.

CONTROL

Code	Description
R44	Reacta 44, Presence & Daylight, 2.5-7M
RAS	Reacta-Air Bluetooth, Wireless, Presence & Daylight, 2.5-3M
RLI	Reacta-Link, Wireless Enabled Luminaire
RLS	Reacta-Link Wireless, Presence, 2.5-4M
RC	Reacta-Control, Wireless Enabled Luminaire
RCS	Reacta-Control Wireless, Presence, Daylight, 2.5-4M

Please click [here](#) for full details on our wireless controls.

EMERGENCY

Code	Description
LE3	Lithium Standard Emergency 3 Hour
LS3	Lithium Selftest Emergency 3 Hour
LA3	Lithium Autotest Emergency 3 Hour

LSTR	Lithium Reacta-Link Emergency 3 Hour
LA3RC	Lithium Reacta-Control Emergency 3 Hour
CB	Central Battery, Please Specify 50V, 110V or 230V when Ordering

MISCELLANEOUS

Code	Description
C**	Select Colour Temperature and Rendering; C83, C84, C85, C865, C93, C94
4PM	4 Pole Panel Mount
6PM	6 Pole Panel Mount
IP44	IP44 Below the Ceiling Only
PBK 123	1200x300 Plasterboard Kit
PBK 126	1200x600 Plasterboard Kit
PBK 66	600x600 Plasterboard Kit
NL	Night Light (Non Emergency Variants Only)
RECESSED TETHER KIT TWIN	Secondary fix twin drop.
LSF	Low Smoke Zero Halogen
ALU16	Alugrid 15/16 Ceiling Compatible
ALU08	Alugrid 15/08 Ceiling Compatible