



# PRODUCT SPECIFICATION

---

OEZ2



---

## INTRODUCTION

---

The OEZ2 is suitable for surface mount installation on walls and ceilings and can be supplied without legend, with hanging blade or with adhesive legends all in ISO 7010 format. With an IP65 rating the OEZ2 is suitable for applications where protection from dirt, dust and water is required. The OEZ2 is available in standard, self test and autotest variants ensuring compatibility with a wide range of emergency testing systems. The OEZ2 incorporates side and conduit entry points for ease of installation.

UK  
CA

CE

IP65

---

## APPLICATION

---

- Canteen
- Commercial / Offices
- Corridor
- Education
- Exterior
- Food / Clean Area
- Healthcare / Social Housing
- Hotel / Leisure
- Industrial / Manufacturing

- Kitchen
- Office
- Parking / Exterior
- Retail
- Stairwell
- Store Room
- Toilet
- Transport
- Warehouse / Storage

---

## SPECIFICATION

---

### CONSTRUCTION

- Housing: Injection moulded polycarbonate
- Finish: Matt white
- ISO 7010 or Euro Norm Legends with all directional arrow options.
- IP65

### ENVIRONMENTAL

- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

### EMERGENCY

- Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.

### INSTALLATION

- Suitable for conduit installation
- Suitable for surface installation

---

## IMAGES

---

### PRODUCT IMAGES



OEZ 2



OEZ 2 with Legend



OEZ LED LL ISO7010



OEZ LED RL ISO7010



OEZ LED UL ISO7010





OEZ LED DL ISO7010

---

## TECHNICAL

---

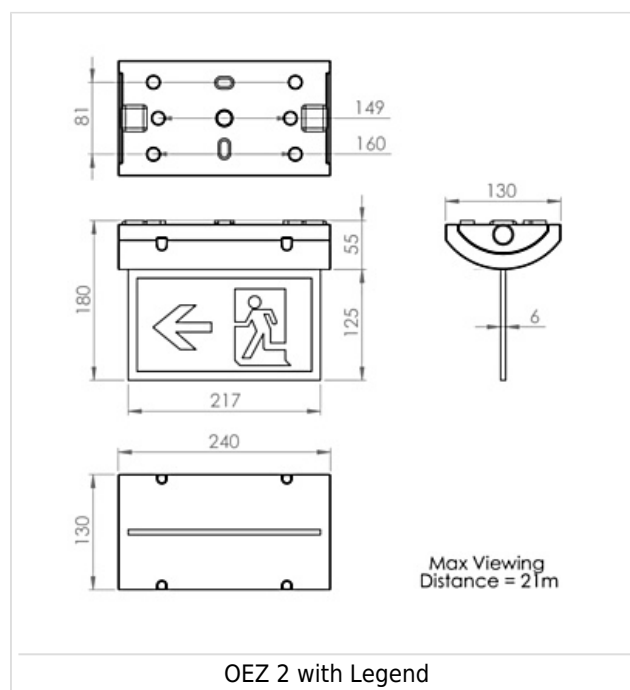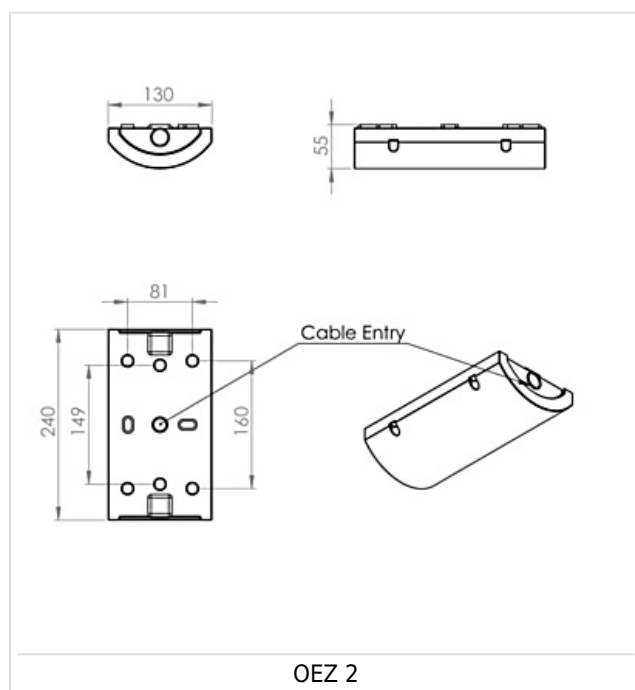

## WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a three year warranty for parts and labour. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty. TWS IP65 L7 in autotest and wireless variants are supplied with the standard three year lithium battery warranty.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.

- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW and the MOD RGBW. These three ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

[DOWNLOAD WARRANTY PDF](#)

## ORDER CODES

### LUMINAIRE

Code	Description
OEZ2 M3 LE3 ATD	OEZ2, Maintained, Lithium Standard Emergency 3 Hour, Standard Diffuser
OEZ2 M3 LE3 ATS	OEZ2, Maintained, Lithium Standard Emergency 3 Hour, Legend Diffuser
OEZ2 M3 LS3 ATD	OEZ2, Maintained, Lithium Self Test Emergency 3 Hour, Standard Diffuser
OEZ2 M3 LS3 ATS	OEZ2, Maintained, Lithium Self Test Emergency 3 Hour, Legend Diffuser
OEZ2 M3 LA3 ATD	OEZ2, Maintained, Lithium Autotest Emergency 3 Hour, Standard Diffuser
OEZ2 M3 LA3 ATS	OEZ2, Maintained, Lithium Autotest Emergency 3 Hour, Legend Diffuser

### EMERGENCY

Code	Description
LE3	Lithium Standard Emergency 3 Hour
LS3	Lithium Selftest Emergency 3 Hour
LA3	Lithium Autotest Emergency 3 Hour
CB	Central Battery, Please Specify 50V, 110V or 230V when Ordering

### MISCELLANEOUS

Code	Description
LSF	Low Smoke Zero Halogen
OEZ2 DL ISO7010	OEZ2 Down Arrow ISO 7010 Legend, Double Sided
OEZ2 LLRL ISO7010	OEZ2 Left / Right Arrow ISO 7010 Legend, Double Sided
OEZ2 UL ISO7010	OEZ2 Up Arrow ISO 7010 Legend, Double Sided
OEZ2 DL ELK ISO7010	OEZ2 Down Arrow ISO 7010 Legend, Self Adhesive
OEZ2 LL ELK ISO7010	OEZ2 Left Arrow ISO 7010 Legend, Self Adhesive
OEZ2 RL ELK ISO7010	OEZ2 Right Arrow ISO 7010 Legend, Self Adhesive
OEZ2 UL ELK ISO7010	OEZ2 Up Arrow ISO 7010 Legend, Self Adhesive