



PRODUCT SPECIFICATION

PROSPORT



INTRODUCTION

In any sporting application high quality lighting is critical to ensure a satisfactory player experience. The Prosport offers a range of distributions and up to 38,592lm luminaire lumens output allowing your scheme to be designed to give optimum light levels and uniformity whilst offering excellent energy efficiency and low maintenance compared to fluorescent and HID sources. The Prosport is IK10 rated and manufactured with a steel housing, injection moulded polycarbonate end caps and a curved clear polycarbonate diffuser ensuring that the luminaire is robust, durable and able to withstand ball strikes from most sports whilst eliminating the risk of shattered lamps which can occur with fluorescent or HID luminaires. The angled housing is designed to be both aesthetically pleasing and to minimise the risk of balls or shuttlecocks lodging on the rear. The Prosport is available with a wide range dimming options as well as integral lithium emergency. We offer a range of wireless control systems providing localised grouping and control as well as comprehensive wireless solutions allowing both standard and emergency luminaires to be centrally monitored.

Two body sizes are available, 1500mm and 1000mm in a range of lumen outputs in both symmetrical and asymmetrical versions allowing the luminaire to be used for general sports hall lighting or for court sports such as tennis and badminton.

UK CA	CE	IP40	IK10	TM21: L90>60K Hours / L80>90K Hours	3 STEP MACADAM ELLIPSE
----------	----	------	------	--	---------------------------

APPLICATION

- Education
- Hotel / Leisure
- Sports Hall

SPECIFICATION

CONSTRUCTION

- Housing: 0.8mm HC220 steel
- Finish: Polyester powder painted BS 00E55 matt white 60% gloss
- Endcaps: Injection moulded polycarbonate
- Diffuser: 2mm clear polycarbonate
- IK10
- IP40

PERFORMANCE

- Part L2 compliant
- 3SCDM Three step Macadams ellipse
- TM21: L90>60K Hours / L80>90K Hours
- Up to 149 luminaire lumens per circuit Watt.

ENVIRONMENTAL

- Designed to allow simple replacement of components with commonly available tools in compliance with the Eco Design Directive, please see the installation leaflet for maintenance instructions.
- Powered by European branded drivers and emergency modules ensuring replacement parts are easily sourced.
- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- Contains no single use plastics or polystyrene packaging.
- Supplied in plain card boxes with paper tape ensuring packaging is easily recycled.
- Designed to allow simple disassembly for end of life recycling.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

EMERGENCY

- Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.
- Optional Reacta-Link wireless emergency for automated centralised reporting.
- Optional Reacta-Control wireless emergency for automated centralised reporting.
- Optional central battery changeover relay

CONTROL

- Optional compatibility with a range of dimming systems including DALI, DSI and Switch Dimming
- Optional integral Reacta-Link for integration with Reacta-Link wireless installations
- Optional integral Reacta-Control for integration with Reacta-Control wireless installations

INSTALLATION

- Suitable for suspended installation
- Suitable for trunking installation
- Rigid suspension is required in areas where ball strikes may occur.

- Please note that the cricket applications should use protective netting to prevent ball strikes to the ProSport LED.

VARIATIONS

- Available with a wide range of colour temperatures and renderings
- Available in a range of housing sizes and lumen outputs


IMAGES

PRODUCT IMAGES





ProSport

PROJECT IMAGES

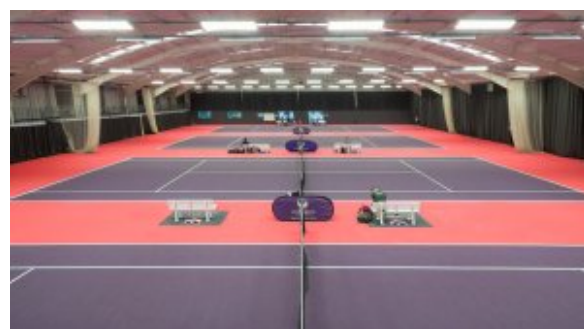

TECHNICAL

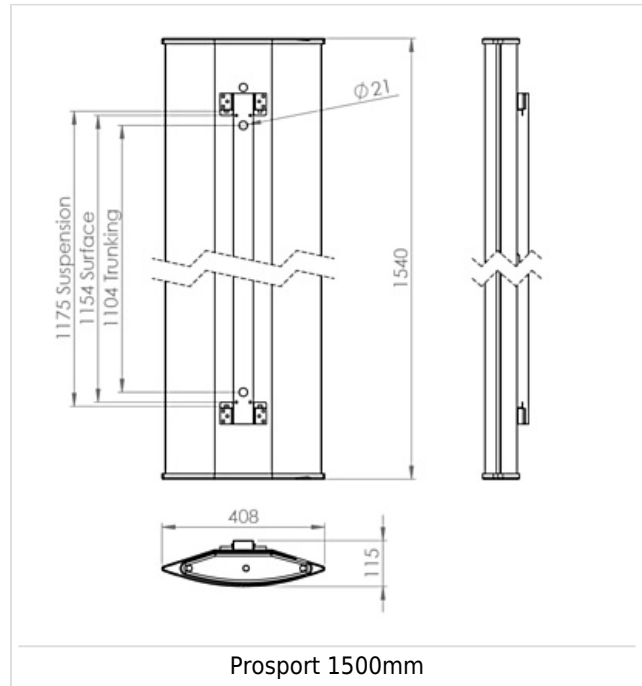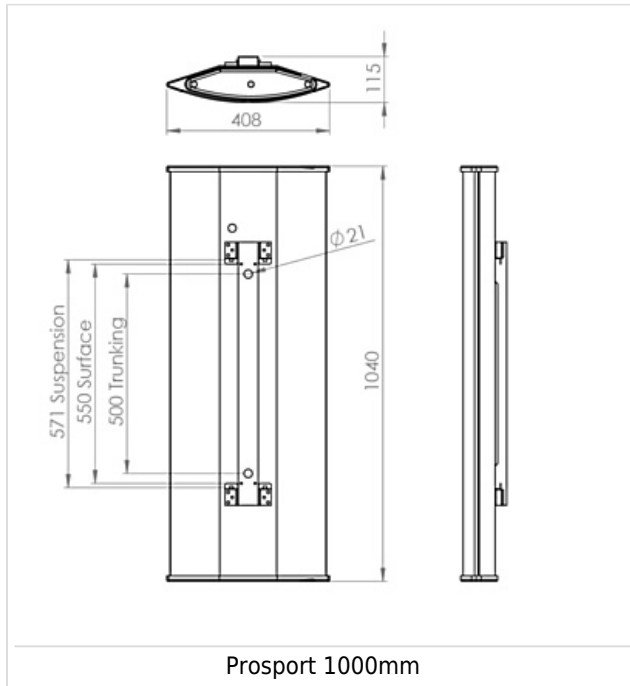

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a three year warranty for parts and labour. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty. TWS IP65 L7 in autotest and wireless variants are supplied with the standard three year lithium battery warranty.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.

- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW and the MOD RGBW. These three ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

[DOWNLOAD WARRANTY PDF](#)

ORDER CODES

LUMINAIRE

Code	Description	Power	Llm/W
PRO L120	Prosport, 1040mm, 9,504lm, Colour 84	63.7W	149
PRO L170	Prosport, 1040mm, 13,466lm, Colour 84	95.9W	140
PRO L240	Prosport, 1040mm, 19,037lm, Colour 84	138.4W	137
PRO L345	Prosport, 1540mm, 27,740lm, Colour 84	199.9W	139
PRO L480	Prosport, 1540mm, 38,592lm, Colour 84	276.0W	139

DIMMING

Code	Description
A	DALI Digital Addressable Lighting Interface
S	Switch Dimming
D	DSI Digital Dimming

H	HFR Analogue 1-10v
---	--------------------

C	Bi-Level Dimming For Standalone Switched Sensor
---	---

The Prosport L345 and L480 use two drivers per luminaire requiring two addresses on the DALI network.

CONTROL

Code	Description
------	-------------

RLI	Reacta-Link, Wireless Enabled Luminaire
-----	---

RC	Reacta-Control, Wireless Enabled Luminaire
----	--

Please click [here](#) for full details on our wireless controls.

EMERGENCY

Code	Description
------	-------------

LE3	Lithium Standard Emergency 3 Hour
-----	-----------------------------------

LS3	Lithium Selftest Emergency 3 Hour
-----	-----------------------------------

LA3	Lithium Autotest Emergency 3 Hour
-----	-----------------------------------

LSTR	Lithium Reacta-Link Emergency 3 Hour
------	--------------------------------------

LA3RC	Lithium Reacta-Control Emergency 3 Hour
-------	---

CB	Central Battery, Please Specify 50V, 110V or 230V when Ordering
----	---

MISCELLANEOUS

Code	Description
------	-------------

C**	Select Colour Temperature and Rendering; C83, C84, C85, C865, C93, C94
-----	--

LSF	Low Smoke Zero Halogen
-----	------------------------

AS	Asymmetric 20° Bracket (Not suitable for suspension)
----	--

PRO 5M SUSPENSION	5 Meter Suspension Kit (Not suitable for sports applications)
-------------------	---