


Runway 600mm Wall Mount Installation

230-240V / 50-60Hz

IP20

IK00



WARNING - THIS LUMINAIRE MUST BE EARTHED


This luminaire has been tested and is manufactured to comply with BS EN 60598 : specification for general requirements and tests. It should be installed by a suitably qualified person in accordance with IEE.

CAUTION: there is a potential risk of electric shock from the LED boards when the product is operational with the cover removed.

NOTE: INSTALLATION AND OPERATION OF THE LUMINAIRE BEYOND ITS SCOPE OF SUPPLY WILL INVALIDATE THE WARRANTY.

DIL-0119-0006


1.

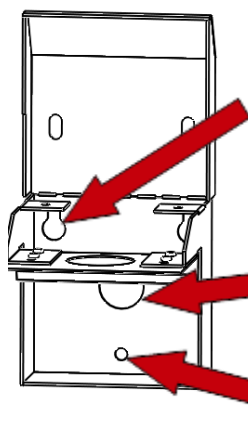

Screw in first to test fit location of bracket and fully tighten once in the correct location.

Drill a hole through the wall as this is where the mains wire will come through


Screw in last to secure into place

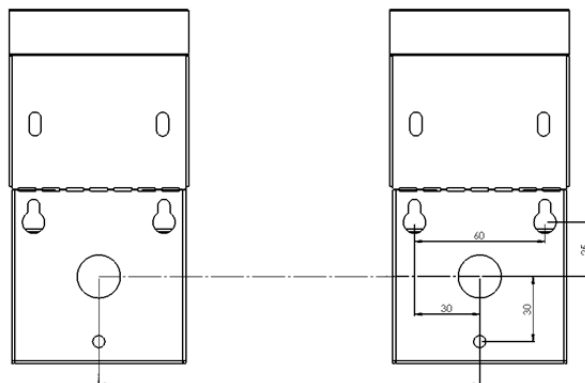

290mm for 600mm Luminaire


2.

Feed mains cable through the hole in the wall.

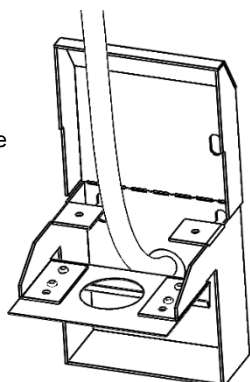

3.


Tilt runway onto front lip of the spring clip. Trunking shown without end caps for installation purposes only.

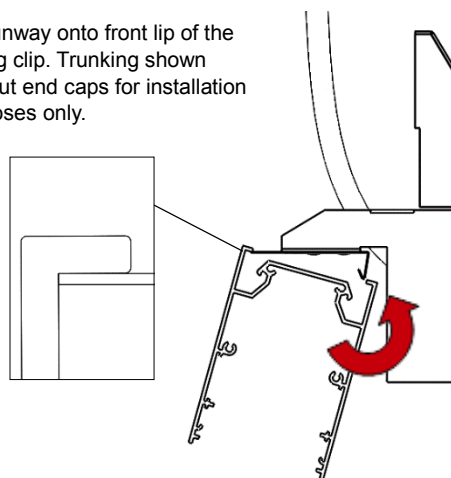

4.

Tilt the rest of the way until it clips over the spring.


Push towards the wall until you hear or feel it click into place. Make sure runway is on top of the spring on the front face.

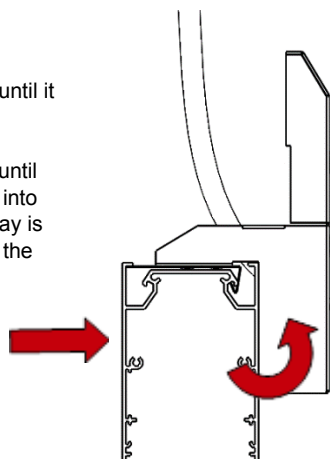







5.

Feed Wire Through grommet into the Runway Extrusion

Fasten Screws to hold runway in position

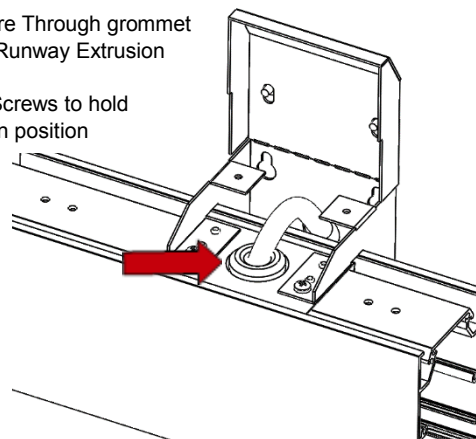

Runway 600mm Wall Mount Installation
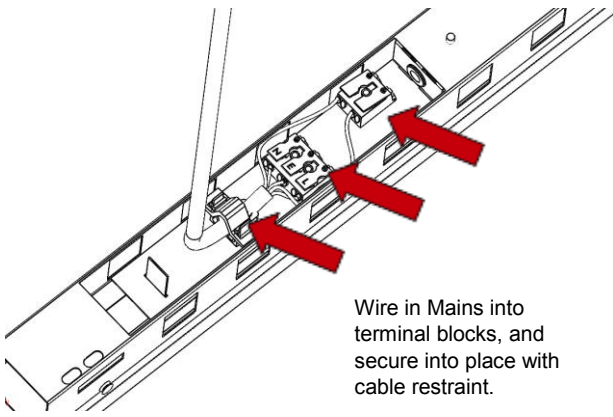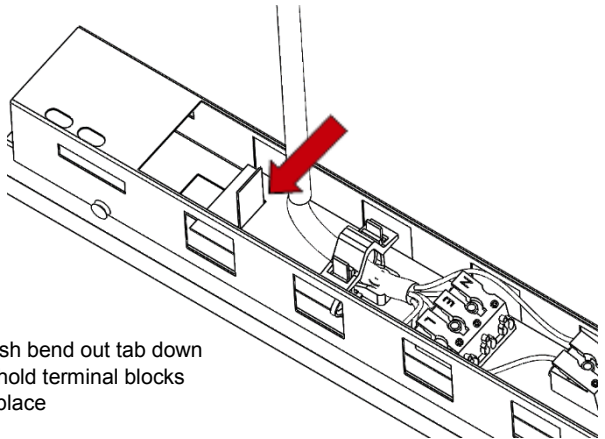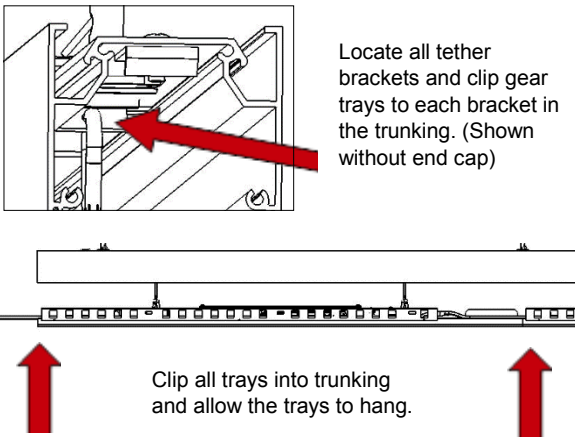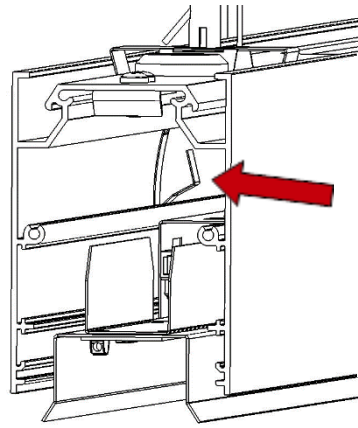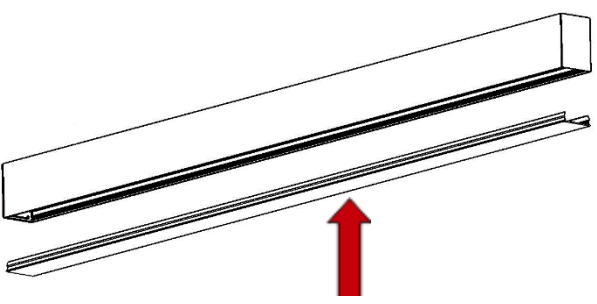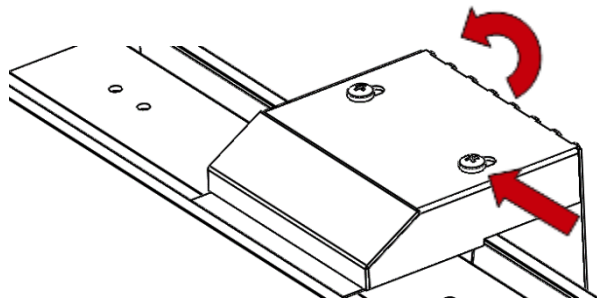
<p>6.</p>  <p>Wire in Mains into terminal blocks, and secure into place with cable restraint.</p>	<p>7.</p>  <p>Push bend out tab down to hold terminal blocks in place</p>
<p>8.</p>  <p>Locate all tether brackets and clip gear trays to each bracket in the trunking. (Shown without end cap)</p> <p>Clip all trays into trunking and allow the trays to hang.</p>	<p>9.</p>  <p>Raise gear trays up into the trunking and engage on small leaf springs as shown.</p> <p>NOTE: END CAP NOT SHOWN TO SHOW LEAF SPRING DETAIL.</p>
<p>10.</p> <p>Unpack the diffusers carefully and offer up into the trunking once gear trays are secured in place. They should snap into place easily.</p> 	<p>11.</p> <p>Fold Lid down and fasten into place.</p> 
<p>12.</p>	<p>13.</p>