





EMERGENCY DALI AUTOTEST

DALI Autotest - Overview

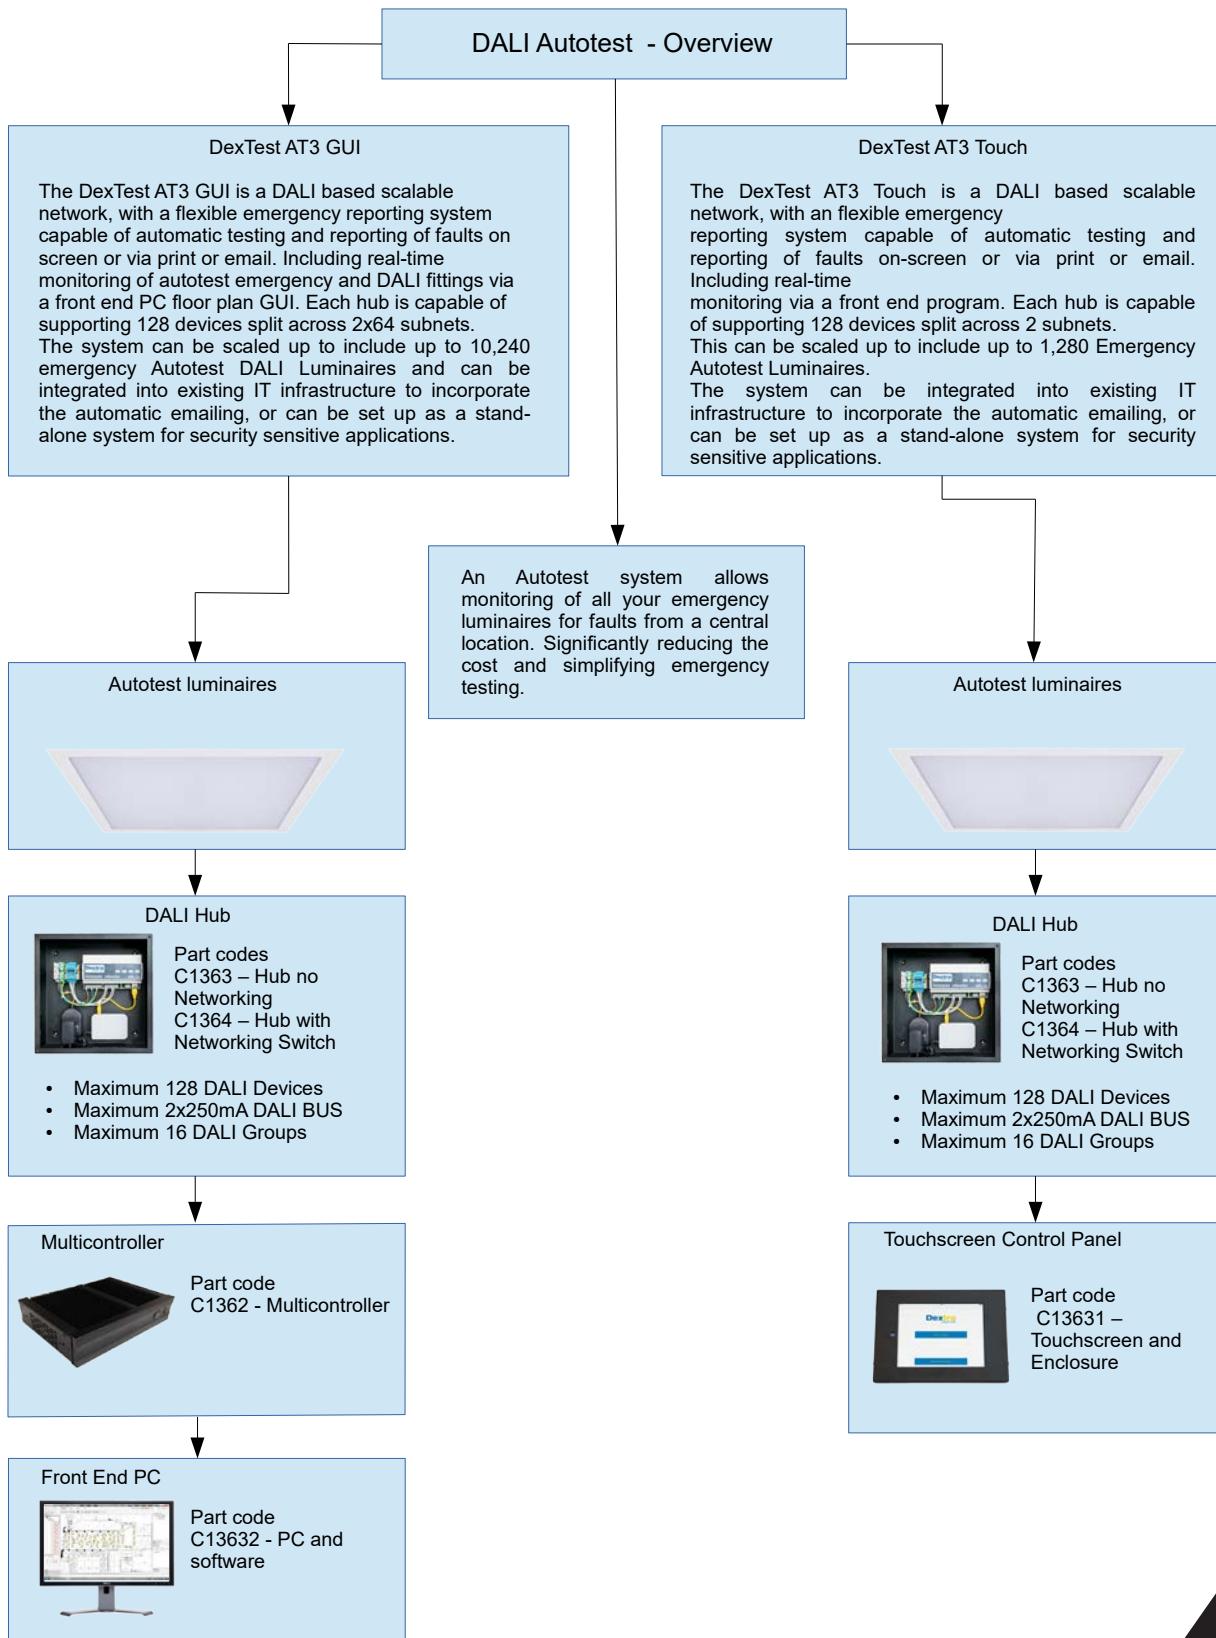


DEXTRA WIRELESS EYENUT SOLUTION

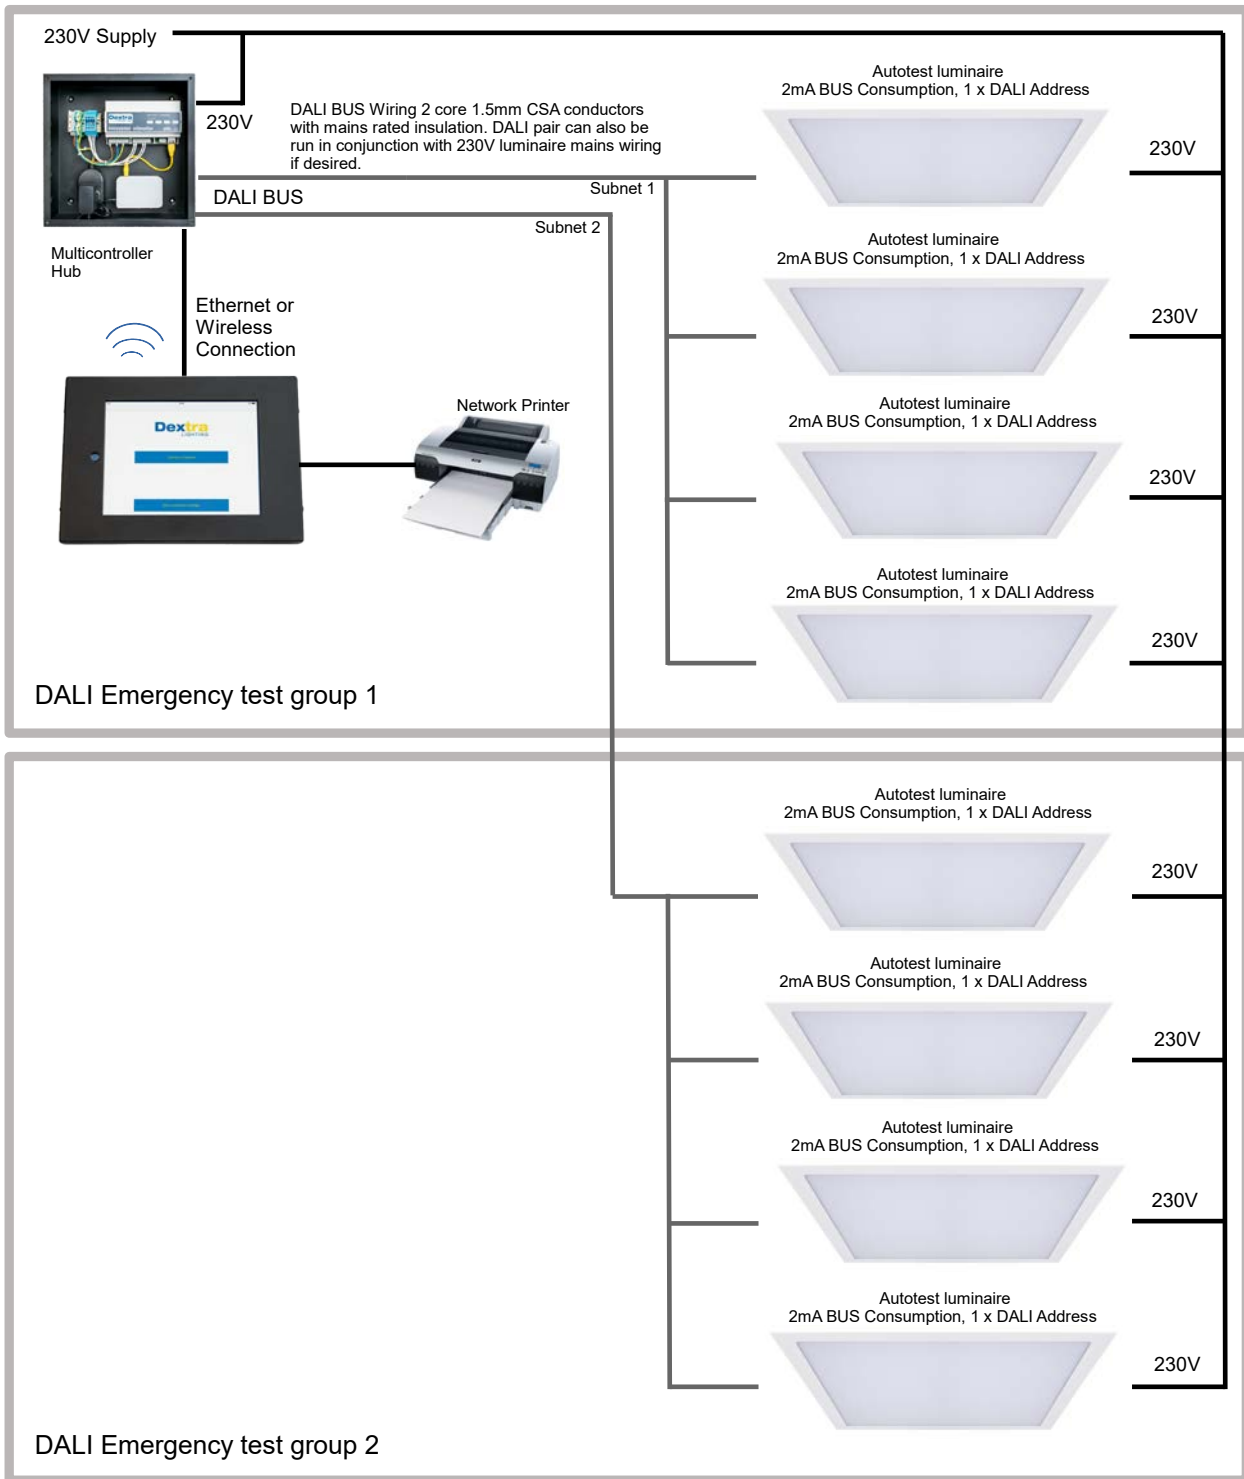

Technical:

- Maximum 128 emergency DALI devices per hub
- Maximum 250mA DALI BUS Power supply. Maximum 300m DALI wiring length when using 1.5mm CSA conductors, in a radial or star wiring topology.
- 16 DALI groups
- Hubs requires 230V input, Touchscreen requires power supplied over Ethernet or USB connection.

DEXTRA WIRELESS EYENUT SOLUTION

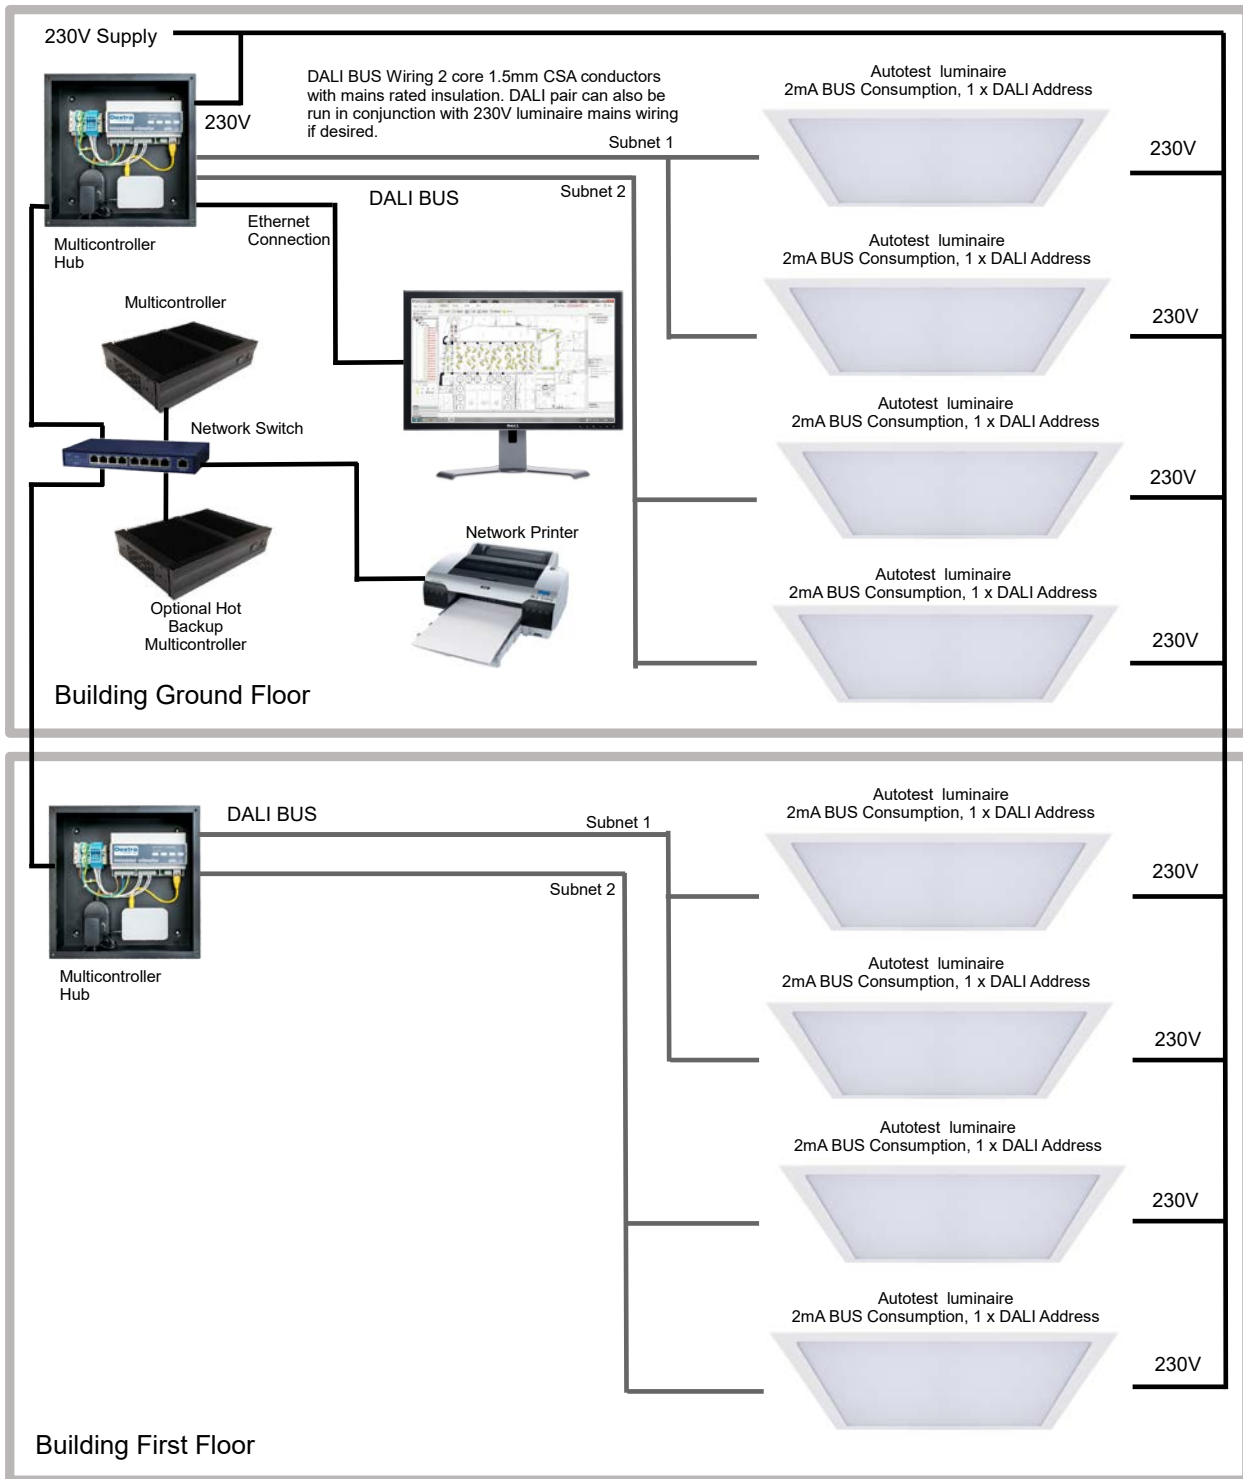

Technical:

- Maximum 128 emergency DALI devices per hub
- Maximum 250mA DALI BUS Power supply. Maximum 300m DALI wiring length when using 1.5mm CSA conductors, in a radial or star wiring topology.
- 16 DALI groups
- Hubs requires 230V input.

The system shown can control up to 256 DALI Addresses (1 per Autotest Emergency Luminaire). It can be expanded to up to 1280 devices per Multicontroller network.