


230-240V / 50-60Hz

IP40

IK10



WARNING - THIS LUMINAIRE MUST BE EARTHED


This luminaire has been tested and is manufactured to comply with BS EN 60598 : specification for general requirements and tests. It should be installed by a suitably qualified person in accordance with IEE.

CAUTION: there is a potential risk of electric shock from the LED boards when the product is operational with the cover removed.

NOTE: INSTALLATION AND OPERATION OF THE LUMINAIRE BEYOND ITS SCOPE OF SUPPLY WILL INVALIDATE THE WARRANTY.


DIL-0349-0001

1.

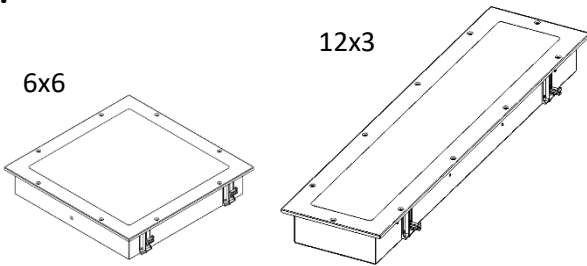


The fitting will come as a complete fitting, you will need to remove the front frame in order to install it into an appropriate ceiling.

2.

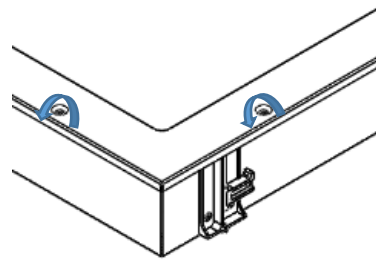


Undo the security fastener screws to release the front frame.

3.



Remove the front frame from the main body of the fitting. Allow the frame to hang on the suspension wires.

4.

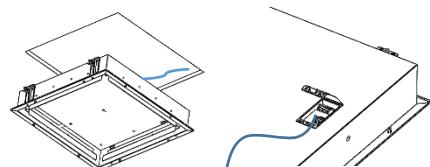


Bring the power cable down through the cut-out in the ceiling and then connect to the terminal block on the back of the fitting.

Recommended cut-out:

575mm x 575mm (6x6) or 1175mm x 275mm (12x3)


Ceiling thickness: 12-75mm

5.


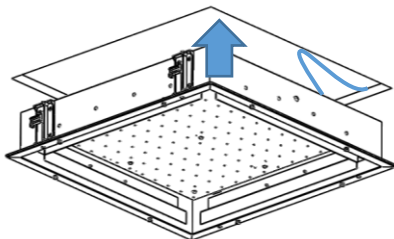


Position the fitting into the cut-out, ensuring the flag brackets are retracted.

6.

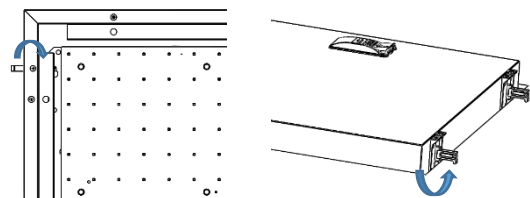

Once the fitting is in position tighten the screws to extend the flag brackets, this will pull the fitting up tight to the ceiling.
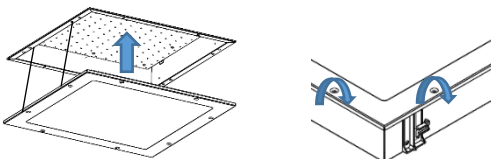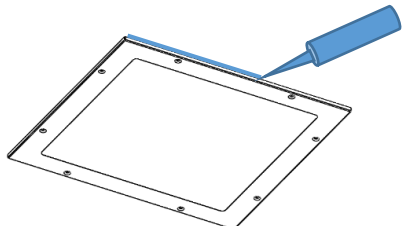
<p>7.</p>  <p>Offer the frame up to the housing and then secure in place using the 8 security fasteners that were removed previously (Step 2).</p>	<p>8.</p>  <p>Run Anti-Pick Mastic around the profile of the fitting ensuring a secure. Must be installed with anti-pick mastic to meet ligature resistant requirements.</p>
<p>9.</p> <p style="text-align: center;"><u>IF SUPPLIED IN RGBW</u></p> <p>Caution:</p> <p>All red, green and blue can be run at the same time, however white can only be run with one additional colour. The fitting must not run all 4 colours at the same time.</p> <p>Under no circumstances should the LEDs in this luminaire be viewed directly, only illuminate this product with the diffuser installed. Directly viewing the LEDs in this luminaire has the potential to damage eyesight.</p>	<p>10.</p> <p>Caution:</p> <p>Under no circumstances should the LEDs in this luminaire be viewed directly, only illuminate this product with the diffuser installed. Directly viewing the LEDs in this luminaire has the potential to damage eyesight.</p>
<p>11.</p>	<p>12.</p>
<p>13.</p>	<p>14.</p>