



# PRODUCT SPECIFICATION

---

## SKY-LIGHT



## INTRODUCTION

The Sky-Light LED range has been developed to offer retailers an aesthetically pleasing energy efficient solution for high level open store lighting. The product utilises the high transmission opal diffusers to provide maximum efficiency whilst ensuring that the point source of the individual LED chips are not visible from below. The bespoke waveform diffusers ensure that the product appears lit when viewed from any angle across the store and the fitting can be supplied in a range of end cap colours to allow you to customise its appearance to match your corporate identity. These features coupled with a wide range of lumen outputs combine to make the Sky-Light LED the most advanced, energy efficient, high level LED luminaire in its class and the ideal choice for the modern retail environment. The Sky-Light 2 is also compatible with a range of wireless controls allowing for basic dimming and control through to centralised web based reporting for energy and emergency reporting with our Reacta-Link system as well as integral lithium emergency helping to ensure the safety of your installation.

We offer a range of wireless control systems providing localised grouping and control as well as comprehensive wireless solutions allowing both standard and emergency luminaires to be centrally monitored.

UK CA	CE	IP20	TM21: L90>60K Hours / L80>90K Hours	3 STEP MACADAM ELLIPSE
----------	----	------	-------------------------------------	------------------------

## APPLICATION

- Hotel / Leisure
- Retail

---

## SPECIFICATION

---

### CONSTRUCTION

- Housing: 0.7mm CR4 steel
- Finish: Polyester powder painted BS 00E55 matt white 60% gloss
- Endcaps: Injection moulded polycarbonate
- Diffuser: 2mm high transmission opal polycarbonate TP(a) rated
- IP20

### PERFORMANCE

- Part L2 compliant
- 3SCDM Three step Macadams ellipse
- TM21: L90>60K Hours / L80>90K Hours
- Up to 150 luminaire lumens per circuit Watt.

### ENVIRONMENTAL

- Designed to allow simple replacement of components with commonly available tools in compliance with the Eco Design Directive, please see the installation leaflet for maintenance instructions.
- Powered by European branded drivers and emergency modules ensuring replacement parts are easily sourced.
- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- Contains no single use plastics or polystyrene packaging.
- Supplied in plain card boxes with paper tape ensuring packaging is easily recycled.
- Designed to allow simple disassembly for end of life recycling.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

### EMERGENCY

- Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.
- Optional Reacta-Link wireless emergency for automated centralised reporting.
- Optional Reacta-Control wireless emergency for automated centralised reporting.
- Optional central battery changeover relay

### CONTROL

- Optional compatibility with a range of dimming systems including DALI, DSI and Switch Dimming
- Optional integral Reacta-Link for integration with Reacta-Link wireless installations

### INSTALLATION

- Suitable for suspended installation
- Suitable for conduit installation
- Can be supplied with M6 captive cage nuts for direct mounting to trunking.

### VARIATIONS

- Available with a wide range of colour temperatures and renderings

- Available in a range of housing sizes and lumen outputs

## IMAGES

### PRODUCT IMAGES



Sky-Light 1500mm



Sky-Light 1000mm




Sky-Light Suspension Kit

### PROJECT IMAGES





## TECHNICAL

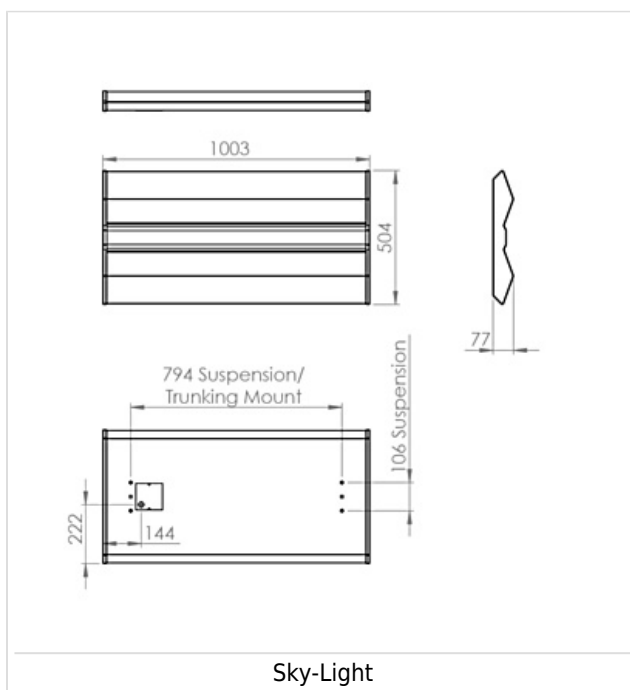

## WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective

components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a three year warranty for parts and labour. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty. TWS IP65 L7 in autotest and wireless variants are supplied with the standard three year lithium battery warranty.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW and the MOD RGBW. These three ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

[DOWNLOAD WARRANTY PDF](#)

## ORDER CODES

## LUMINAIRE

Code	Description	Power	Llm/W
SKY L132 OP WH	Skylight, 10,718lm C84, 1000mm, Opal Diffuser	75.7W	141
SKY L170 OP WH	Skylight, 13,804lm C84, 1000mm, Opal Diffuser	96.6W	142
SKY L192 OP WH	Skylight, 15,590lm C84, 1000mm, Opal Diffuser	107.8W	144
SKY L222 OP WH	Skylight, 18,025lm C84, 1000mm, Opal Diffuser	128.2W	140
SKY L255 OP WH	Skylight, 20,451lm C84, 1000mm, Opal Diffuser	135.6W	150
SKY L300 OP WH	Skylight, 24,060lm C84, 1000mm, Opal Diffuser	173.9W	138
SKY L340 OP WH	Skylight, 27,283lm C84, 1000mm, Opal Diffuser	193.3W	141

## DIMMING

Code	Description
A	DALI Digital Addressable Lighting Interface
S	Switch Dimming
D	DSI Digital Dimming
H	HFR Analogue 1-10v
C	Bi-Level Dimming For Standalone Switched Sensor

## CONTROL

Code	Description
RLI	Reacta-Link, Wireless Enabled Luminaire
RLS	Reacta-Link Wireless, Presence, 2.5-4M
RLS10	Reacta-Link Wireless, Presence, 5-10M
RLS15	Reacta-Link Wireless, Presence, 10-15M
RCS	Reacta-Control Wireless, Presence, Daylight, 2.5-4M
RCS18	Reacta-Control Wireless, Presence, Daylight, 8-18M

Please click [here](#) for full details on our wireless controls.

## EMERGENCY

Code	Description
LE3	Lithium Standard Emergency 3 Hour
LS3	Lithium Selftest Emergency 3 Hour
LA3	Lithium Autotest Emergency 3 Hour
LSTR	Lithium Reacta-Link Emergency 3 Hour
LA3RC	Lithium Reacta-Control Emergency 3 Hour
CB	Central Battery, Please Specify 50V, 110V or 230V when Ordering

## MISCELLANEOUS

Code	Description
C**	Select Colour Temperature and Rendering; C83, C84, C85, C865, C93, C94
4PM	4 Pole Panel Mount
6PM	6 Pole Panel Mount
LSF	Low Smoke Zero Halogen
SKY 5M SUSP GPLKIT	5mtr Loop Over Suspension Kit (Two Drops)
SKY 10M SUSP GPLKIT	10mtr Loop Over Suspension Kit (Two Drops)